

Power tillers

EL 22



www.kuhn.com



be strong, be **KUHN**

DESIGNED FOR INTENSIVE USE BY SMALL OPERATORS

The EL 22 range of power tillers is suitable for 15 to 25 hp tractors. Designed with the same rigor as models for professional use, these are machines for the small operator. For your comfort: no oil change needed, no chain tension to check - no maintenance. Accessible hitch, modern pleasing design, quality work output and easy cleaning: The attributes of the EL 22 power tiller will be valued every time you use it.



NO MAINTENANCE!

The side gearbox needs no special maintenance. From now on forget:

- oil changes
- checking the chain tension!



STRENGTH AND SAFETY

To protect the machine in the event of overload, the transmission is fitted with a limiter as standard. The central gearbox is also maintenance-free.



LARGE ROTOR

For increased service life, the rotor has a 45 mm diameter solid shaft. The blades efficiently incorporate plant residues. For maximum efficiency: the side blades are mounted towards the outside.

TECHNICAL SPECIFICATIONS


Power tillers

	EL 22-120	EL 22-150
Working width (cm/ft)	126 / 4'1"	147 / 4'8"
Transport width (cm/ft)	164 / 5'4"	185 / 6'1"
Maximum allowable DIN engine power (kW/hp)	19/25	
Minimum PTO power requirement	12/16	13/18
Transmission	with shear bolt safety	
Lateral drive	by ASA 60 HV chain	
Rotor speed at 540 (min ⁻¹)	241	
Rotor diameter (mm/inches)	390 / 15"	
Min/max working depth (cm/ft)	5(0'2") / 15(0'5")	
Hitch category	0 and 1	
Right hand offset (cm/in)	progressively from 0 to 10 / 0 to 0'3	
VWeight with skids (kg/lbs)	153/337	167/368

Optional equipment: transmission with friction slip clutch - quick Hitch with quick couplers

**For more information
about your nearest KUHN dealer,
visit our website**

www.kuhn.com

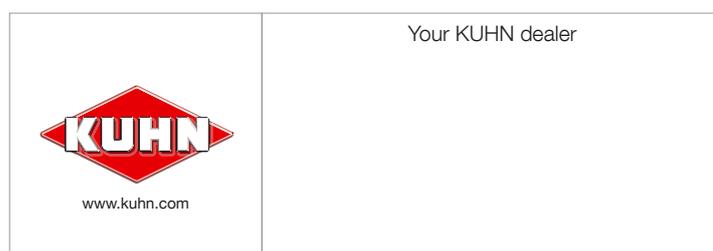

KUHN S.A.

4 Impasse des Fabriques - BP 50060 - F-67706 Saverne CEDEX-France

KUHN NORTH AMERICA, INC.

1501 West Seventh Avenue - P.O. BOX 167 - Brodhead, WI 53520 - USA

KUHN FARM MACHINERY PTY. LTD

313-325 Foleys road - Deer Park, 3023 Victoria AUSTRALIA

KUHN FARM MACHINERY (U.K.) LTD

Stafford Park 7 - GB TELFORD/ SHROPS TF3 3BQ

Some machines have a considerable weight. Respect the tractor gross vehicle weight rating, its lift capacity and maximum load per axle. The tractor front axle load must always reach minimum 20 % of the tractor net weight. Our material is produced in accordance with the European Machinery Directive in the member states of the European Union. In countries outside the E.U., our machinery complies with the safety regulations set by the country concerned. Some safety devices may have been removed from our leaflets in order to clarify the illustration. Under no circumstances should the machine be operated without the necessary safety devices in place (as specified by the assembly instructions and operators manual). We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Also find KUHN on

