


FIELDQUIP®

...a cut above the rest!

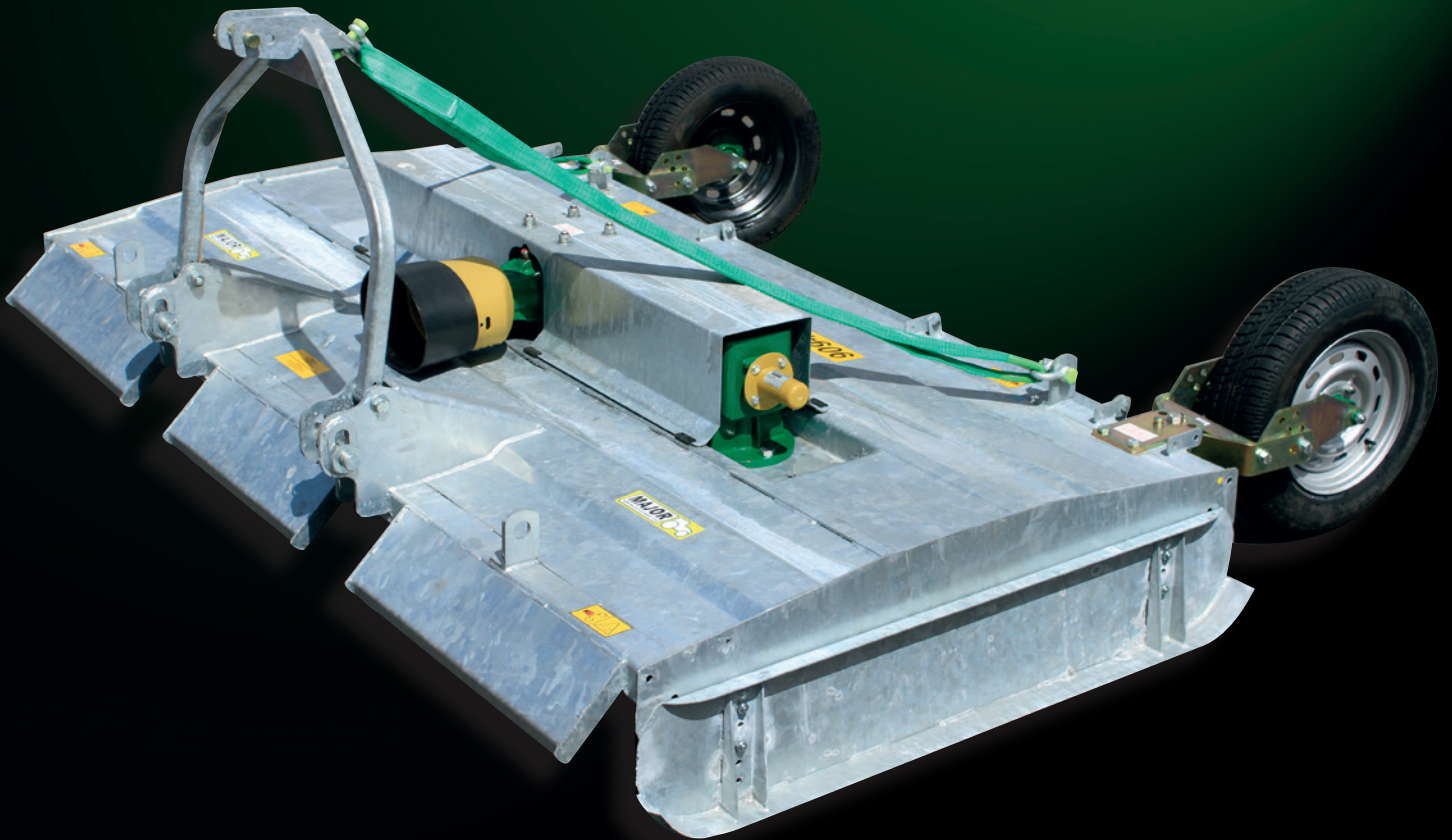

SETTING THE STANDARD

CENTRE MOUNTED TOPPER SERIES

THREE POINT LINKAGE

CENTRE MOUNTED TOPPER SERIES

- Heavy duty transmission
- Rubber shock absorbers between rotor gearboxes
- Low maintenance - no belts or pulleys
- Twin cut swinging blade system

The MAJOR Centre Mounted Topper is a fully gear driven machine fitted with high speed rotors and twin cut swinging blades.

The 909HD Topper is a heavy duty topper featuring galvanised deck, extra heavy duty gearbox and is standard with twin wheels.

A shearbolt PTO shaft is supplied as standard for best power transfer. There is the option available of an overrun and slip clutch PTO.

| Model | Working Width | Weight | HP (Min.) | Rotors | Cutting Height |
|-----------|---------------|----------|-----------|--------|----------------|
| 7FTGDX-HD | 2.1m (7') | 370 kg* | 40-70 | 2 | 50-250mm |
| 909HD | 2.7m (9') | 560 kg** | 50-120 | 2 | 50-250mm |

* 450kg with wheels; ** 640kg with wheels

FIELDQUIP 
...a cut above the rest!

FREECALL: 1800 454 150

**Phone: (07) 4691 1500 Fax: (07) 4691 1511 www.fieldquip.com.au
199 Bridge Street Oakey Queensland Australia 4401**

Additional lines may be added or deleted from the range in this guide -
visit www.fieldquip.com.au for new models and availability