



Front attachments

Combine harvester front attachments

LEXION TUCANO AVERO DOMINATOR

CLAAS





Overview of front attachments	4
Standard cutterbars	6
CERIO cutterbars	10
VARIO cutterbars	14
VARIO / CERIO rice harvesting	20
MAXFLEX cutterbars	22
CONVIO FLEX / CONVIO	26
Folding cutterbars	34
CORIO CONSPEED / CORIO	38
SUNSPEED	46
SWATH UP	50
Feeder housing	54
Equipment	56
Front attachment trailers	62
Front attachment matrix	64
Features	66
Technical data	67

Combine harvester front attachments. Meeting diverse harvesting requirements.

For every requirement.

The wide range of CLAAS combines offers you the right machine for every job. But the harvesting process starts with the front attachment and only the right one will allow your machine to work effectively and to perform to the highest standard.

CLAAS ensures that the harvesting process gets off to the best possible start by offering you the right front attachment – and therefore a high level of flexibility – for every threshable grain. Whether you are harvesting grain, such as wheat, rye, barley, oats and triticale or rapeseed, maize, sunflowers, rice, soya, flax, beans, lentils, millet, grass seed or clover seed – CLAAS front attachments allow you to make full use of your combine's performance potential.

The wide range of CLAAS front attachments offers you the perfect answer – for every machine, every application, every crop and every requirement.

Standard cutterbar



VARIO 1230 / 1080



Folding cutterbar



SUNSPEED



CERIO 930-560



MAXFLEX



CORIO CONSPEED



SWATH UP



VARIO 930-500



CONVIO FLEX/ CONVIO



CORIO





Standard cutterbars.

The C 490 to C 370 standard cutterbars are equipped with the tried and trusted rigid cutterbar table. They impress with their excellent manageability and remarkable qualities.

The highlights at a glance:

- Intake auger diameter of 480 mm for excellent crop flow
- C 490, C 430 and C 370 for AVERO
- C 450, C 420 for the DOMINATOR 130
- Robust knife drive
- Proven rigid cutterbar table
- MULTIFINGER intake auger
- Hydraulic reel drive



Use.

The compact standard cutterbars from CLAAS deliver excellent grain harvesting results. They represent a reliable cutterbar choice for the DOMINATOR and the AVERO which is ideal for harvesting in small areas and compact field patterns.



Robust drive

Technology.

- Proven rigid cutterbar table
- Robust knife drive via oil-bath transmission
- 1120 strokes/min
- Automatic tensioning of drive belts
- MULTIFINGER intake auger
- 480 mm diameter intake auger
- Intake auger height is infinitely adjustable



Stripper bars adjustable from outside (C 490, C 430, C 370)



The C 450 and C 420 cutterbars are available for the DOMINATOR 130




CERIO cutterbars.

CLAAS has extended its range of standard cutterbars with the CERIO 930 to 560 models. These are based on the VARIO 930 to 500 cutterbars and represent an optimal alternative for grain harvesting.

The highlights at a glance:

- Cutterbar table has an overall manual adjustment range of 200 mm
- Large, 660 mm diameter intake auger for optimal crop flow
- Reel optimised to reduce stalk take-up
- MULTIFINGER intake auger
- Crop dividers adjustable for height without tools

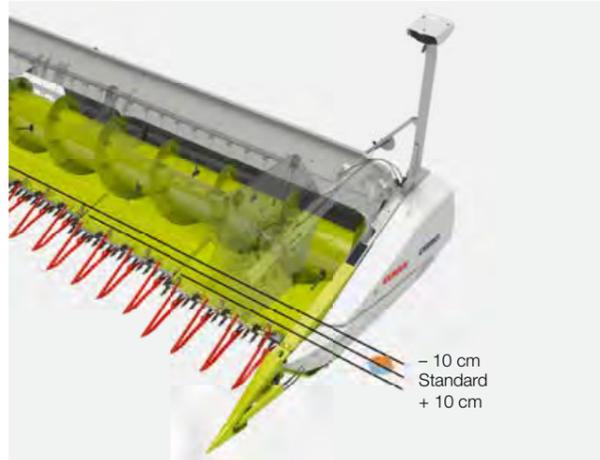

- 10 cm
Standard
+ 10 cm

Technology.

- Manually adjustable table position from - 100 mm to + 100 mm
- Overall manual adjustment range of 200 mm
- Knife drive shaft with automatic, telescopic function
- Continuous knife bar and continuous reel
- Front attachment mechanical drive on one side
- Intake auger and knife bar mechanically driven via gearbox and drive shaft
- Reel with optimised reel tine carriers, wear-resistant tine tube bearings and a new design to reduce risk of wrapping and stalk take-up
- Angled cross-tube for a better view of the cutterbar table from the cab
- Intake auger height is infinitely adjustable
- Feeder housing and intake auger can be reversed
- Stripper bars adjustable from the outside
- LASER PILOT for automatic guidance system can be folded and adjusted without tools
- Automatic parking and transport position
- Automatic operating position

Use.

The CERIO model series is based on the VARIO 930 to 560 cutterbars and is an alternative for grain harvesting. It is ideally suited to deliver high performance and high area output, whether operating in low or high-yield regions. The cutterbar table can be adjusted manually from - 100 mm to + 100 mm. This means that the cutterbar is able to respond to differing crop conditions or varieties.

The wide range of models, from the CERIO 930 to the CERIO 560, allows the LEXION, TUCANO and AVERO to use CERIO cutterbars.



Cutterbar adjustment.

- Manual adjustment under cutterbar table
- Ten screw fixings allow adjustment of cutterbar table
- Five table positions can be set: + 100 mm, + 50 mm, 0 mm, - 50 mm, - 100 mm

Use in rice.


The CERIO cutterbars are equipped ex factory – or can easily be converted – with a coated feed roller and a rice harvesting system for optimal performance in rice.



Rugged drive train.

Thanks to its planetary transmission, the knife bar drive runs extremely smoothly. When the cutterbar table position is changed, the drive shaft adjusts telescopically at the same time, thus allowing work to continue in any position without the need for operator intervention.

The feed roller and knife drive are protected by individual overload clutches. This system allows the CERIO cutterbar to withstand the most adverse conditions and ensures reliable operation.

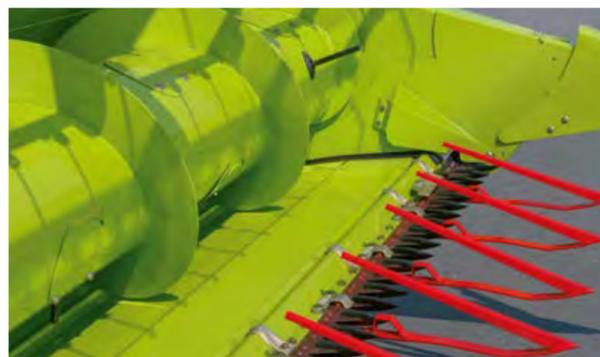


Cutterbar table retracted – grain (- 100 mm)



Cutterbar table extended – grain (+ 100 mm)



Quick and easy replacement of dividers

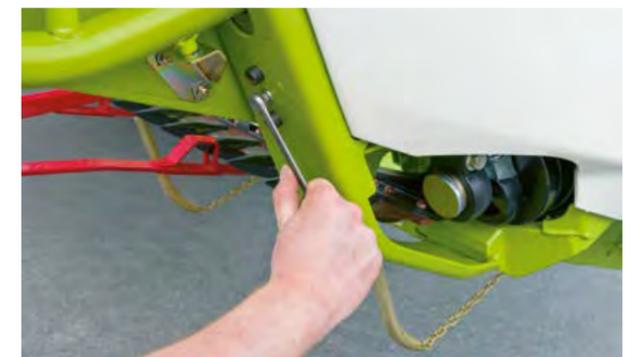

Easy adjustment of divider height using the panel key



VARIO cutterbars.

VARIO cutterbars from CLAAS are synonymous with the best cutterbar table adjustment system in the market. With its VARIO 1230 to VARIO 500 models, CLAAS has made systematic enhancements to its proven VARIO cutterbar range.

The highlights at a glance:

- Integrated rapeseed plates allow infinite adjustment within an overall range of 700 mm for grain and rapeseed
- Large, 660 mm diameter intake auger for optimal crop flow
- Reel optimised to reduce stalk take-up
- MULTIFINGER intake auger
- Quick-release mounting system allows crop dividers and rapeseed knives to be fitted/removed without tools
- Automatic parking and transport position
- Automatic operating position


Use.

The new generation of VARIO cutterbars is the first choice for harvesting grain and rapeseed. It is ideally suited to deliver high performance and high area output, whether operating in low or high-yield regions. The ability to adjust the VARIO cutterbar table for grain harvesting (short or long straw varieties) and rapeseed ensures an optimal crop flow at all times and therefore results in an increase in total machine performance of up to 10%.

The wide range of models, from the VARIO 1230 to the VARIO 500, allows the LEXION, TUCANO and AVERO to use VARIO cutterbars.

Technology.

- Cutterbar table with integrated rapeseed plates
- Table position adjustable from - 100 mm to + 600 mm using the multifunction control lever
- Cutterbar table with infinitely variable overall adjustment range of 700 mm
- Knife drive shaft with automatic, telescopic function
- Continuous knife bar and continuous reel (VARIO 930 to VARIO 500)
- Front attachment mechanical drive on one side (VARIO 930 to VARIO 500)
- Intake auger and knife bar mechanically driven via gearbox and drive shaft
- Reel with optimised reel tine carriers, wear-resistant tine tube bearings and a new design to reduce risk of wrapping and stalk take-up
- Angled cross-tube for a better view of the cutterbar table from the cab
- Intake auger height is infinitely adjustable
- Feeder housing and intake auger can be reversed
- Stripper bars adjustable from the outside
- LASER PILOT for automatic guidance system can be folded and adjusted without tools

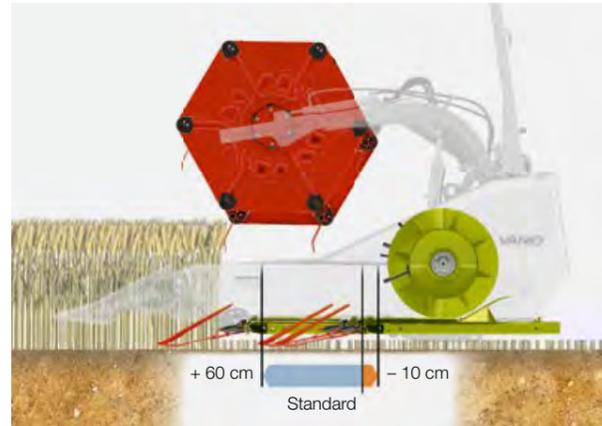

Cutterbar table retracted – grain (- 100 mm)



Cutterbar table extended – with rapeseed knives (+ 600 mm)



Plug & Play for rapeseed.

Thanks to the rapeseed plates integrated in the cutterbar table and the ability to fit the rapeseed knives without tools, conversion to rapeseed harvesting takes only a matter of minutes. Connecting the rapeseed knives to the hydraulic system automatically activates the hydraulic pump which drives the side knives. The connection is made easily with two flat-seal couplings.

- The hydraulic pump is switched on and off automatically
- Even with the rapeseed knives fitted, the table can still be extended or retracted by 150 mm
- A locking transport container on the attachment trailer allows the rapeseed knives to be carried securely and saves weight on the cutterbar

Use in rice.

The VARIO cutterbars are equipped ex factory – or can easily be converted with a coated feed roller and a rice harvesting system – for optimal performance in rice.



Rugged drive train.

Thanks to its planetary transmission, the knife bar drive runs extremely smoothly. When the cutterbar table position is changed, the drive shaft adjusts telescopically at the same time, thus allowing work to continue in any position without the need for operator intervention.

The feed roller and knife drive are protected by individual overload clutches. This system allows the VARIO cutterbar to withstand the most adverse conditions and ensures reliable operation.



Rapeseed knives fitted by means of quick-release mounting system

The VARIO cutterbars VARIO 1230 and VARIO 1080.



Optimal crop flow.

The VARIO cutterbars from CLAAS are designed for the most demanding field conditions. An optimal crop flow, clean cutting and a robust design are the defining characteristics of the two largest models, the VARIO 1230 and VARIO 1080. For these working widths, CLAAS uses the principle of the divided reel and intake auger as well as a divided knife bar.

Ever since its introduction in 2009, this system has proved to be the ideal solution under all conditions for the high throughput associated with the most powerful LEXION combine harvesters. The crop flows from both halves of the cutterbar are combined at the centre of the cutterbar. The outstanding strength and ruggedness required to handle such large quantities of harvested material have made the VARIO cutterbars the benchmark for the industry.

Precise adjustment produces the best results.

An optimal crop flow starts right at the cutterbar, with the correct height setting of the intake auger being a particularly important factor. This is why height scales are provided at the adjustment points on the left and right sides and in the centre. This makes for effortless adjustment of the auger to the perfect height for every requirement.



The drive train.

Thanks to the mechanical drive via drive shafts, gears and large chains, the drive train is extremely efficient and requires little maintenance. The synchronised knife drive makes for a very smooth-running cutterbar. An overload clutch protects the entire drive train in the event of the intake auger becoming jammed. The knives are driven by gears on the left and right sides and are also protected by overload clutches.

Overload protection is also provided for the hydraulic drive of the rapeseed knives. If one of these is jammed by a foreign body, a shut-off valve protects the hydraulic system from overpressure.

PREMIUM LINE equipment.

PREMIUM LINE equipment is available for the VARIO 1230 and 1080 cutterbars. Where this is specified, the centre of the cutterbar trough in the area of the feeder housing is made of stainless steel. In addition, the AUTO CONTOUR sensor bands are made of wear-resistant material and the skids under the cutterbar table are adjustable without tools.



Following the ground.

In order to ensure that excellent cutterbar guidance is also maintained over large working widths, the VARIO 1230 and VARIO 1080 models have two additional sensors. These are located in the centre and provide the AUTO CONTOUR system with an additional signal to identify the position of the cutterbar table.



Rice harvesting with the VARIO and CERIO cutterbars.



The right equipment for a tough job.

Rice stalks are extremely tough. To achieve clean, top quality cutting results at a high rate in this hard and unforgiving material, the VARIO 930-500 and the CERIO 930-560 cutterbars can be adapted to the conditions.

Special double fingers and adjustable crop guards help ensure efficient cutting under even the most adverse conditions.

An impressive line-up.

Various cutterbar widths with matching rice components are available for the TUCANO and LEXION series. They are identical to the standard cutterbars of the corresponding models with regard to function and operation.

The high-performance VARIO cutterbars from CLAAS are also available with rice harvesting components to enable quick adjustment to changing harvesting conditions.

Hardened intake auger.

During rice harvesting operations, the machine has to cope with an excessive amount of dirt. To inhibit premature wear, the hardened intake auger has sintered edges.

The speed of the intake auger is reduced to ensure optimal feeding of the green and heavy rice plants.





MAXFLEX cutterbars.

The 1200 to 560 MAXFLEX cutterbars offer you the perfect solution for harvesting crops close to the ground. Their unique multicrop capability for grains and soybeans also results in high flexibility and makes them extremely user-friendly when harvesting a variety of different crops.

The highlights at a glance:

- 180 mm flexible knife bar
- Knife bar is suitable for soybeans and grains (multicrop capability)
- Electrohydraulic system allows flexible knife bar to be set to rigid configuration and returned to flexible mode again from the cab
- Large, 660 mm diameter intake auger for optimal crop flow
- Reel optimised, lowest risk of wrapping
- MULTIFINGER intake auger
- New type of flexible reel tines for working close to the ground



Use.

Legumes, such as soybeans, peas and lentils, grow in pods close to the ground. It is therefore important to cut the crops as close to the ground as possible at harvest time. In this way, every last pod gets picked up by the machine and cutterbar losses are effectively prevented.



Technology.

- 180 mm flexible knife bar
- Electrohydraulic system allows flexible knife bar to be set to rigid configuration (for use in grains) and returned to flexible mode again (soybean harvesting) via the multifunction control lever or directly on the cutterbar
- Cutting angle adjustment for different conditions via HP feeder housing and V channel
- Stripper bars adjustable from the outside
- Optional grain baffle to avoid bouncing grain loss
- Intake auger height is infinitely adjustable
- LASER PILOT for automatic guidance can be folded and adjusted without tools
- Compatibility with grain thanks to grain sensors, crop lifters and grain cutting system
- Stainless steel floor plate in central area of cutterbar table
- Automatic parking and transport position
- Automatic operating position



Optimised settings.

Adjustable skids for reliable front attachment guidance and cutting height adjustment.



Just follow the ground.

Skids with integrated AUTO CONTOUR system for perfect adaptation to ground contours across entire working width.



Reliable cutting.

For clean cutting, even under adverse conditions (e.g. moist plants, weeds), the short double fingers are open at the front.



Great versatility.

Front attachment guidance when harvesting grain can be provided by equipping the left and right sides each with a pair of AUTO CONTOUR sensors.



Grain harvesting equipment.

Short, closed double fingers make it possible to fit crop lifters.



Special short soybean crop dividers can deflect upwards



Stowage position for crop divider points during transport

CONVIO FLEX / CONVIO.

The new draper cutterbar.

Powerful cutterbar for all crops.
Draper cutterbars for higher performance.

Draper cutterbars are used wherever low-growing and low-fruited stalk crops or difficult conditions (laid grain, volunteers) necessitate very low cutting. The flexible cutterbar table ensures optimal ground contour following, even with large widths, while the belts make for a gentle and even crop flow.





Innovative reel for the highest throughput. New reel design.


The newly developed reel with its innovatively shaped, adjustable cam track allows the reel tines to pick up the crop before it is cut, thereby keeping front attachment losses to a minimum, especially in laid grain. In short crops in particular, the tines optimise the feeding of the crop into the cutterbar. In addition, the unique flip-over concept prevents the crop from wrapping on the reel. In this way, the crop is fed efficiently, consistently and with minimal losses onto the belts of the CONVIO cutterbar, from where it is delivered evenly into the combine harvester.

Automatic reel torque control.

Thanks to the hydraulic reel drive, the torque applied to the reel can be adjusted automatically to cope with difficult harvesting conditions, such as laid crops. An automatic height control system, which operates on the basis of the programmed pressure and sensitivity levels, prevents the tines from digging into the ground.



Cam-track-controlled reel with flip-over concept

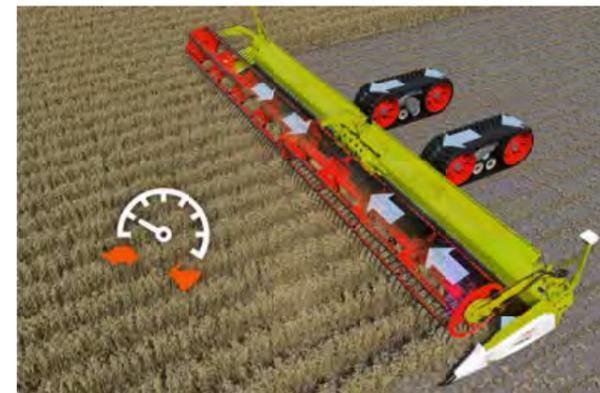


AUTOMATIC BELT SPEED for the conveyor belts.

The AUTOMATIC BELT SPEED operator assistance system adjusts the speed of the belts to the harvesting speed continuously and completely automatically.

Advantages for the operator:

- 1 Constant, automatic adjustment of the belt speeds, especially in uneven crop stands
- 2 Speeds are always set correctly for an even crop flow

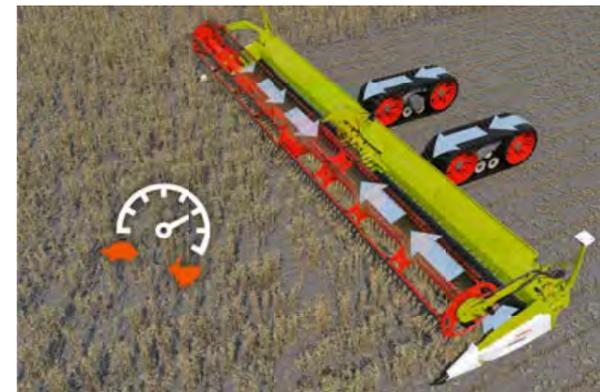

Reversing function for the critical elements.

Two reversing modes are available to ensure that it is possible to respond to the specific requirements of any situation: the toggle switch on the armrest reverses the reel, centre belt, intake auger and feeder housing, the button on the multifunction control lever reverses the centre and side belts while on the move.

In the event of belt slippage, the early warning system is triggered: this allows the operator to identify and intervene in critical situations at an earlier stage. Furthermore, the operator can monitor the correct load status of the belts – even in twilight or at night.



Reversing is possible with CMOTION (1) or toggle switch (2)




Optimal support makes for productive operators.
ACTIVE FLOAT for the knife bar.

CONVIO FLEX is equipped as standard with the ACTIVE FLOAT hydropneumatic suspension. This suspension system allows the ground pressure of the knife bar to be adjusted to the field conditions from the cab while on the move.

Advantages for the operator:

- 1 Precise cutterbar guidance close to the ground through optimal ground pressure
- 2 Ideal when working in conditions where the moisture level – dew in the morning or evening, for example – is rising

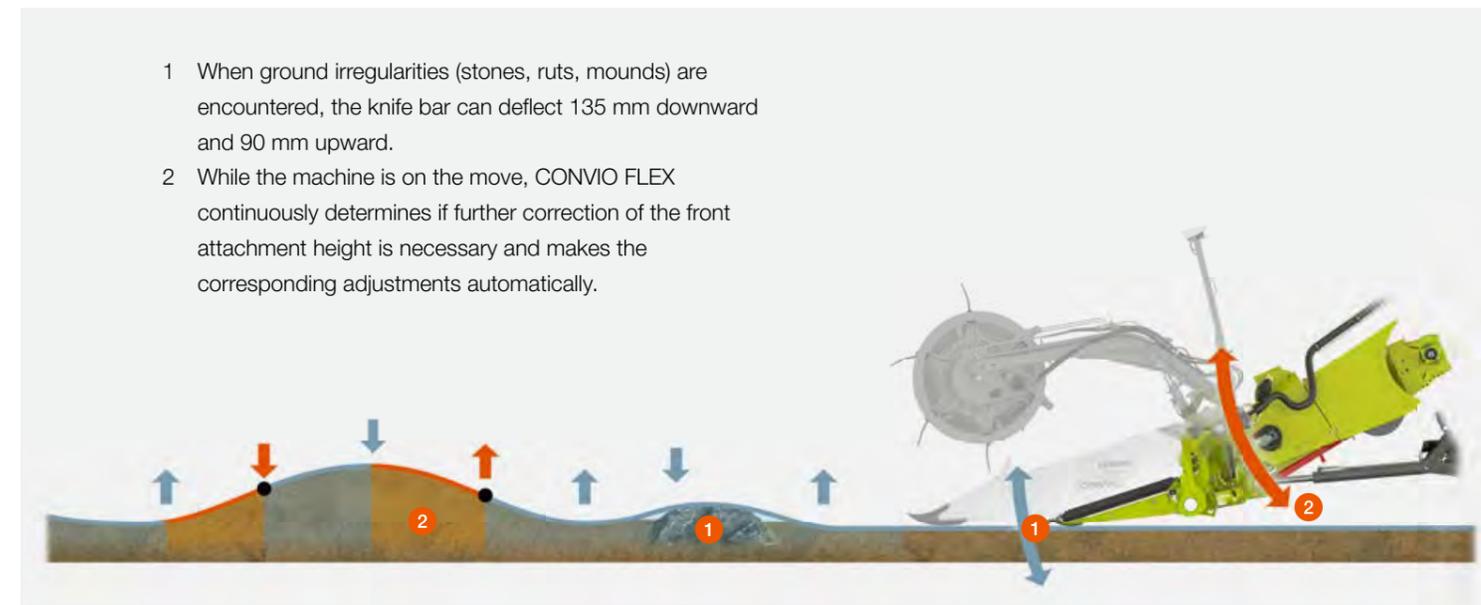

- 1 When ground irregularities (stones, ruts, mounds) are encountered, the knife bar can deflect 135 mm downward and 90 mm upward.
- 2 While the machine is on the move, CONVIO FLEX continuously determines if further correction of the front attachment height is necessary and makes the corresponding adjustments automatically.

Maximum flexibility for all ground contours.
CLAAS AUTO CONTOUR for optimal cutting.

Maximum reduction in operator workload with optimal cutting performance – CONVIO FLEX can be used in four different modes:

1 Grain mode.

Cutterbar table and knife bar are set to a rigid configuration.

2 Laid grain mode.

The knife bar is rigid but can be changed to flexible mode with a touch of a button while on the move. This is especially useful for avoiding crop losses when dealing with isolated laid crop areas during grain harvesting.

3 Manual flex mode.

When manual flex mode is activated, the knife bar resting on its skids but exerting no ground pressure follows the ground contours. The flexible knife bar can avoid obstacles with a 90 mm upward deflection and also follow the ground contours with a downward deflection of 135 mm. With a total flex range of 225 mm, CONVIO FLEX is therefore able to adjust to practically all ground conditions.

4 AUTO FLEX mode.

AUTO FLEX is a self-learning system which automatically optimises the height of the front attachment on the basis of the ground contours and thereby offers a number of important advantages:

- The greatest possible downward flex range is always available
- The knife bar is always maintained as close as possible to the reel
- The lowest cutting height is achieved





Well equipped for grain harvesting.

The CONVIO cutterbars are equipped as standard with crop lifters which are particularly practical when harvesting laid crops.

Made-to-measure crop dividers.

In addition to long and short grain crop dividers, special long and short soybean crop dividers are available for soybean harvesting. An optimal solution for every crop.



Smooth cutterbar guidance.

Hydropneumatically suspended stabiliser wheels prevent the cutterbar from rocking when operating in uneven terrain. This feature also ensures smooth cutterbar guidance at high ground speeds and enhances driving comfort.

Flawless crop flow.

For very bulky crops, such as rapeseed, feed augers are available to support the crop flow in the rear part of the cutterbar.



Plug and Play for rapeseed harvesting.

The hydraulically powered rapeseed knives can be fitted without the use of tools in a matter of minutes. Once the rapeseed knives are fitted, the feed augers are activated automatically and the cutterbar is ready for rapeseed harvesting.

Loss-free harvesting.

As a component of the rapeseed equipment, the raised rear wall reliably prevents bouncing grain losses.



Folding cutterbars.

In smaller-scale settings in particular, there are many advantages associated with a compact cutterbar which can be deployed quickly and remain on the combine harvester.

The highlights at a glance:

- No additional trailer necessary
- Front attachment mechanical drive
- MULTIFINGER intake auger
- Transport width of 3.0 m
- Controls for folding mechanism by access ladder outside cab
- Full AUTO CONTOUR capability
- Very good view through folding mechanism in direction of travel

Folding cutterbars.

Use.

The folding cutterbars do away with the need to attach and detach the cutterbar. At the same time, they ensure optimal handling during travel with outstanding visibility and enable transfers from field to field with practically no interruption. During transport, too, whether on field tracks, narrow roads, narrow roads or in dense traffic, the folding cutterbars offer outstanding visibility and excellent transport characteristics.

Technology.

- Divided knife bar and divided reel
- Front attachment mechanical drive on one side
- Intake auger and knife bar mechanically driven via gearbox and drive shaft
- Intake auger height is infinitely adjustable

Transport.

The compact design ensures optimum visibility and excellent manoeuvrability in severely restricted spaces while taking into account the permissible transport width.

Folding.

The fully hydraulic folding function is activated at the touch of a button. The strong, sectional frame construction makes for precise actuation and ensures long-term operating reliability.

Harvesting.

The folding cutterbar is ready for action in a matter of seconds. Move the dividers into position, engage the drive shaft and you are ready to go.




Transport



Folding dividers



Compact dimensions

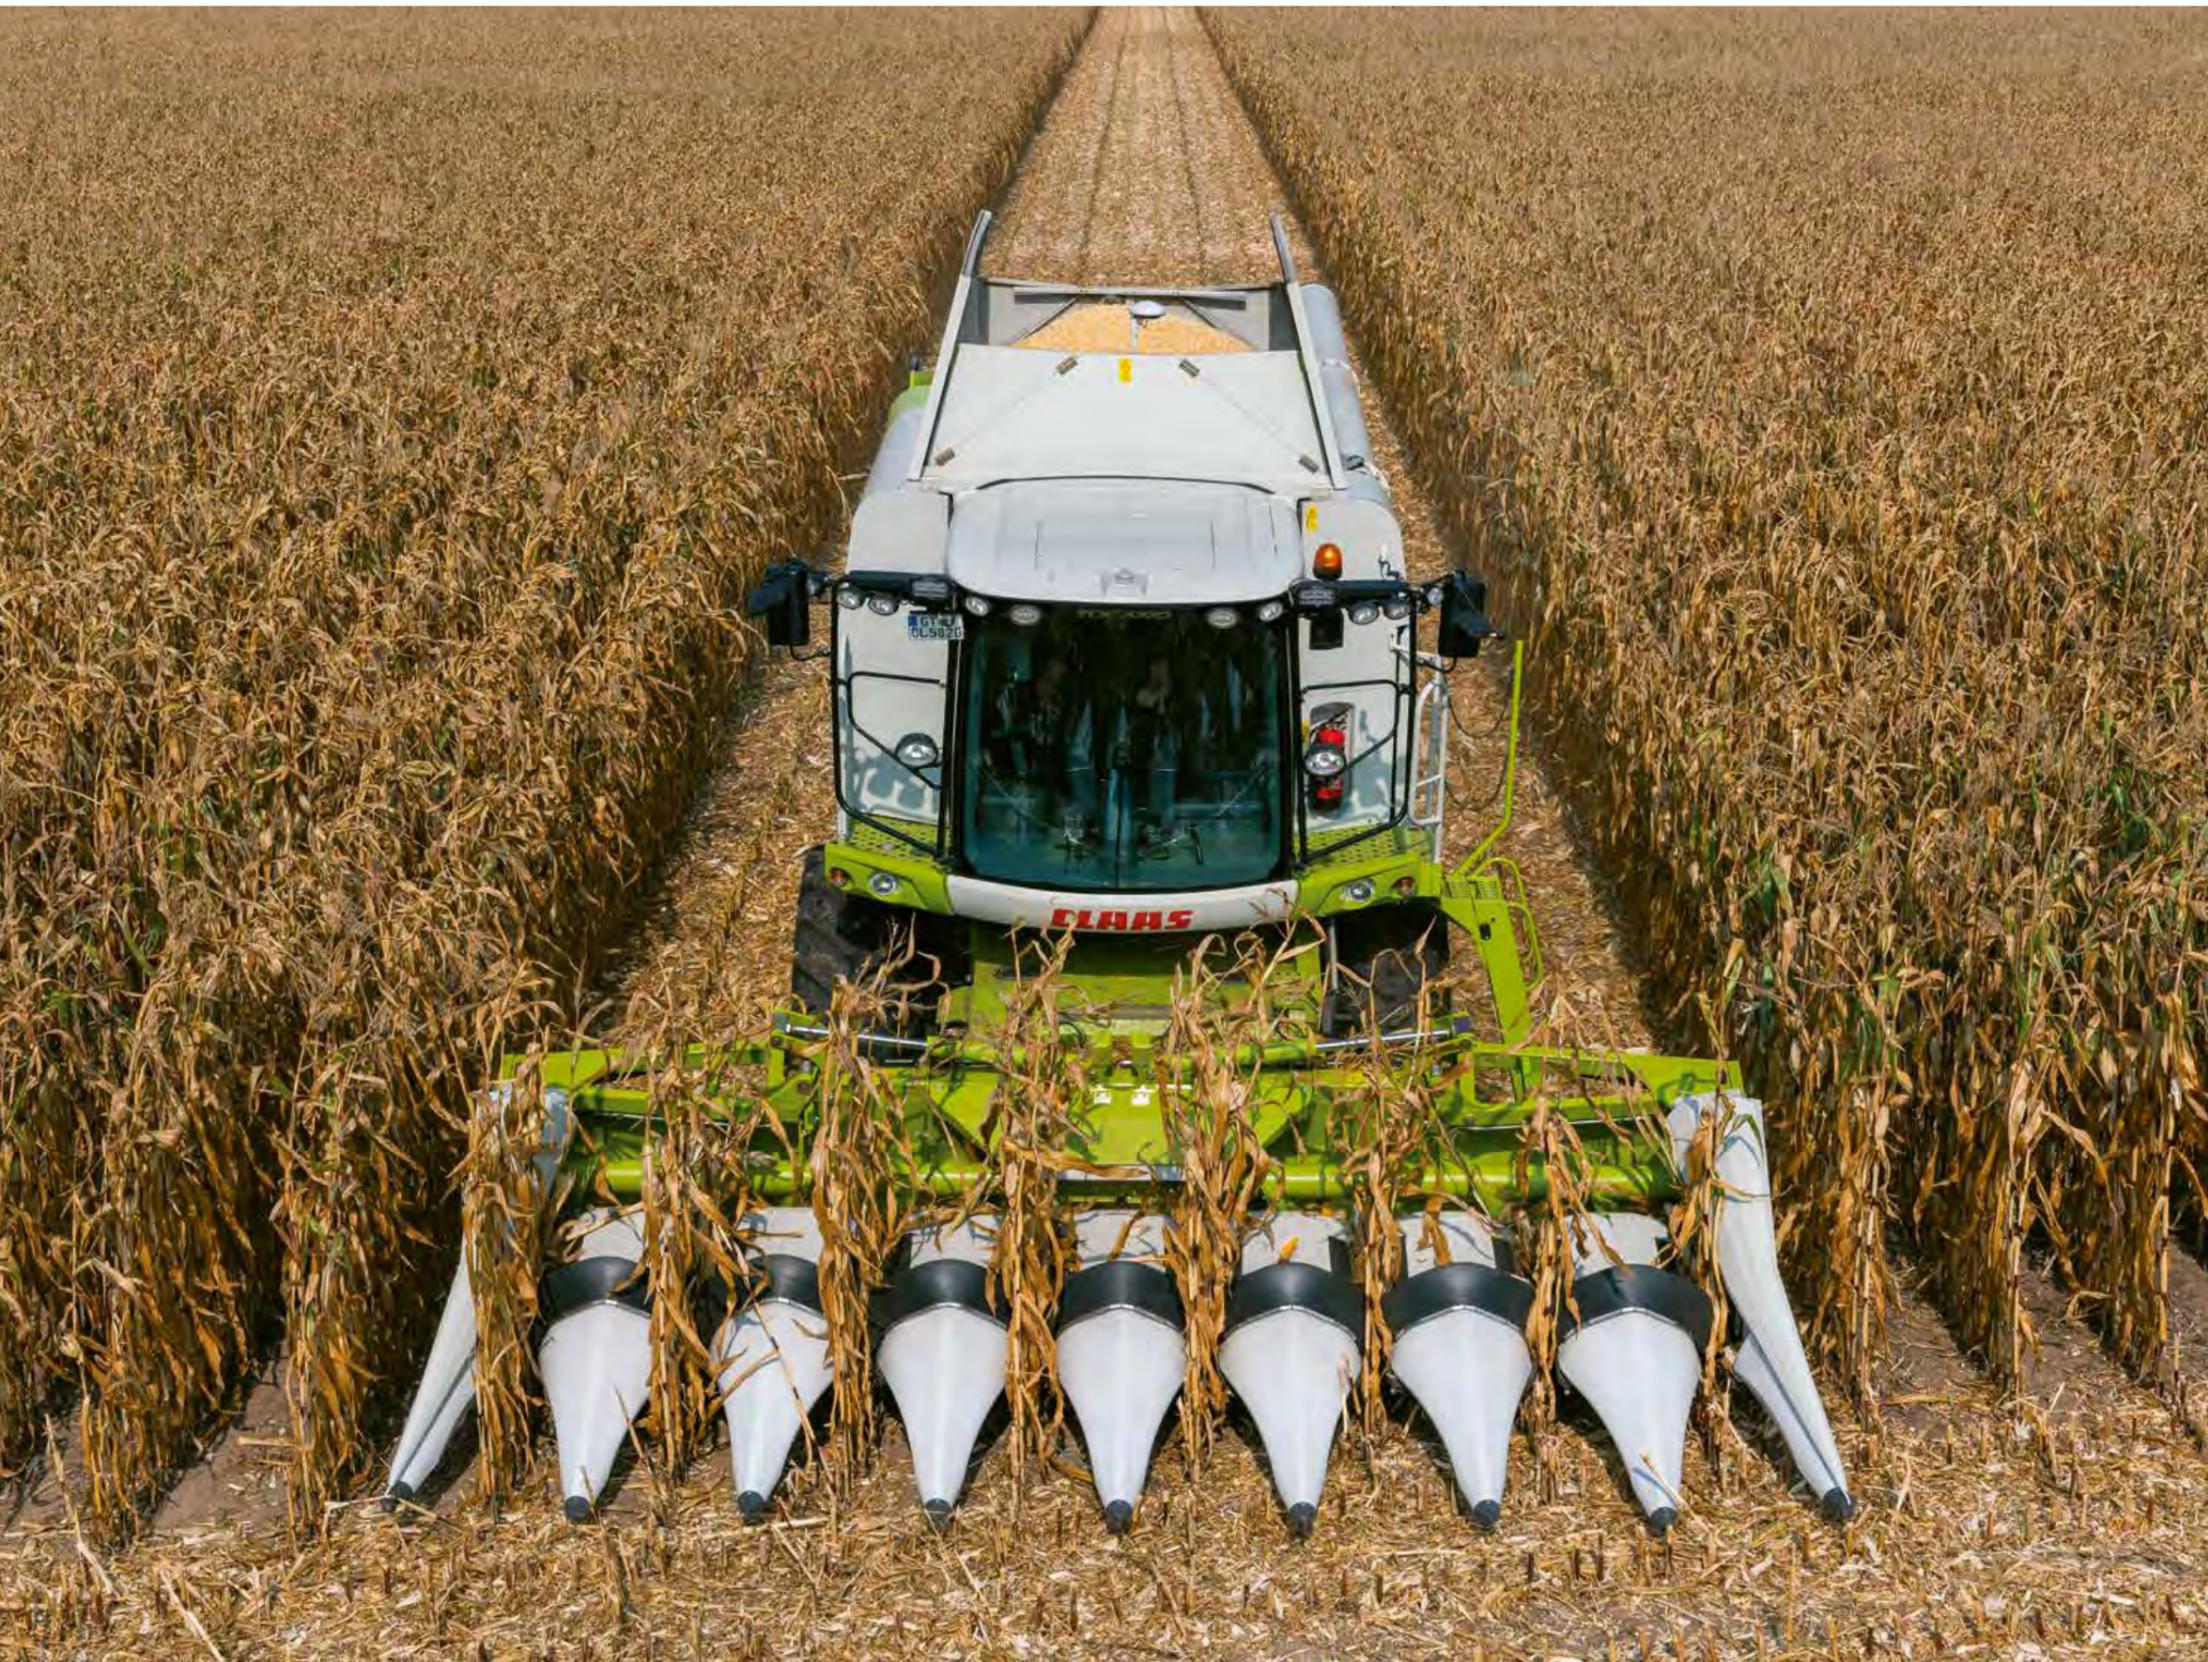

CORIO CONSPEED and CORIO.

The CORIO and CORIO CONSPEED maize pickers are equipped with established technologies as well as unique new features.

The highlights at a glance:

- 17° operating angle to prevent cob losses
- Straight (CORIO) and conical snapping rollers (CORIO CONSPEED)
- Robust drive train in all CORIO models
- Specially shaped hoods for gentle crop handling
- Unique folding system for hood tips reduces the length of the picker on the road by almost 80 cm
- Feeder chain is easy to change and tension
- Replaceable wear parts integrated in hoods
- CORIO CONSPEED maize picker as 12, 8 and 6-row unit
- CORIO maize picker as 8, 6, 5 and 4-row unit
- Row widths of 90, 80, 75 and 70 cm

Use.

The CORIO CONSPEED and CORIO model series are the right maize pickers for harvesting grain maize or corn cob mix. Whether working in high-yield crops or very dry maize stems, the CORIO CONSPEED and CORIO maize pickers ensure a clean, effective picking process, from the LEXION to the AVERO.

Thanks to the new folding mechanism for the hood tips, the length of the CORIO and CORIO CONSPEED models can be reduced by almost 80 cm for road transport. This makes for safe on-road travel, even when negotiating junctions and field exits where visibility is restricted.

Functional principle.

The hoods ensure that the maize stalks are fed evenly and gently into the snapping rollers. The stalks are captured by the rollers and pulled downwards. At the same time, snapping plates separate the maize cobs cleanly from the stalks.

Horizontal choppers operating at a constant speed chop up the maize stalks which have been pulled down. The intake auger then transports the maize cobs to the feeder housing.

The central elements of the CORIO CONSPEED and CORIO maize pickers are the snapping rollers which also embody the main difference between the two models.

- CORIO CONSPEED: conical snapping rollers
- CORIO: straight snapping rollers



Technology.

- Efficient, free-running drive for all CORIO CONSPEED and CORIO models
- Quick and easy speed adjustment by changing the combination of gears
- Spiral intakes on the snapping rollers improve stalk intake
- Mechanically or hydraulically adjustable snapping plates allow the cobs to be separated cleanly
- Each snapping gear unit is individually protected against overload and foreign bodies
- The drives for the snapping rollers and knives are integrated in the robust gear housing
- Available in rigid or folding versions
- AUTO PILOT and AUTO CONTOUR optionally available for all models
- The horizontal chopper captures plants along the entire length of the picker opening.



17° operating angle.

- At 17° the CORIO CONSPEED and CORIO models have the flattest operating angle in the market.
- The operating angle has been reduced by approximately 10%
 - Reduction in cob losses, especially those resulting from "cob jump-off"
 - In laid maize in particular, the flat angle and the new hood shape help make for blockage-free operation



Horizontal chopper.

Each picking unit is equipped with a horizontal chopper integrated in the transmission unit. The position of the chopper knife enables precise chopping of the rest of the plant, resulting in fast rotting and the formation of a consistent seedbed for the following crop.



Top form.

- The front part of the hoods has a new, unique shape.
- Even more gentle crop handling thanks to the optimised shape of the hoods
 - The flanks of the hoods have been designed in such a way that maize stalk capture is delayed and takes place at a more flexible point in order to avoid cob losses
 - Improved performance in laid maize



Precise chopping.

The precise chopping encourages the rotting of the crop residues and helps create a consistent seedbed for the following crop.



Maintenance position.

A new concept for opening the hoods provides quick and easy access for maintenance or cleaning. Only a few simple steps are required to put a hood into the maintenance position without tools.



Easy handling.

The conveyor chains can be tensioned and changed easily, conveniently and quickly. Once the hoods have been put in the maintenance position, a simple assembly lever is all that is required to release a chain, tension or replace it.



New folding mechanism.

A new design allows the hoods to be folded easily into a compact transport position. As well as being easy to use, the new arrangement makes for better visibility during on-road travel as it allows the front attachment to be shortened by 80 cm.



On-road travel.

Covers and a light bar make for safe on-road travel in accordance with the relevant traffic regulations.

Rubber cob retainer.

All models are equipped as standard with small rubber cob retainers to prevent the cobs from falling out. A large rubber cob retainer is available as an option to enable loss-free harvesting in tall crops too. Fitting and removal can be performed by means of a quick mounting system on each hood.



Integrated wear parts.

Replaceable wear parts are integrated on the right and left sides of the hoods. When worn, the individual parts can be replaced instead of having to replace the entire hood.




Sunflower kit.

Simply turning round the feeder chain is all that is required to switch over quickly for sunflower harvesting. In addition, rigid knives are fitted on the snapping plates along with side hood extensions and a raised rear wall panel.




Snapping plate adjustment.


Depending on the model, a mechanical or hydraulic snapping plate adjustment system is fitted as standard. The hydraulic variant, which allows convenient adjustment from the operator's seat, can also be added as an option.

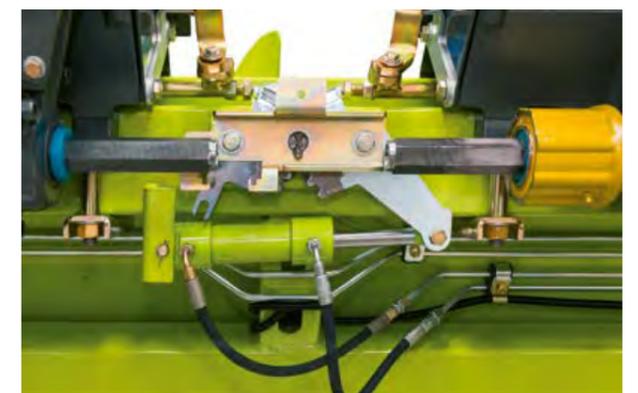


CORIO CONSPEED

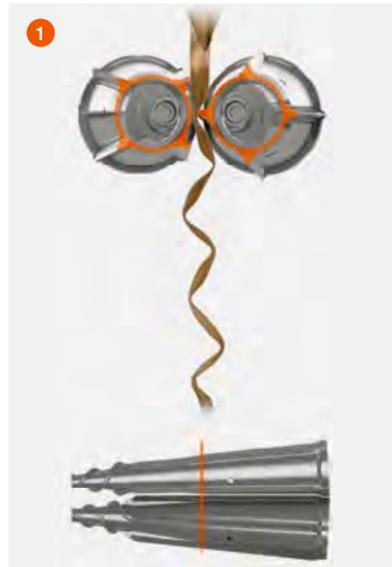

CORIO CONSPEED

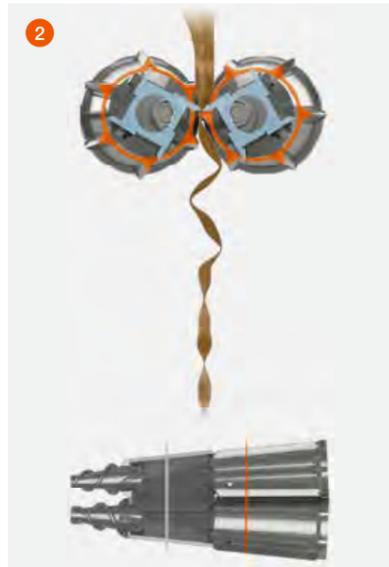

CORIO

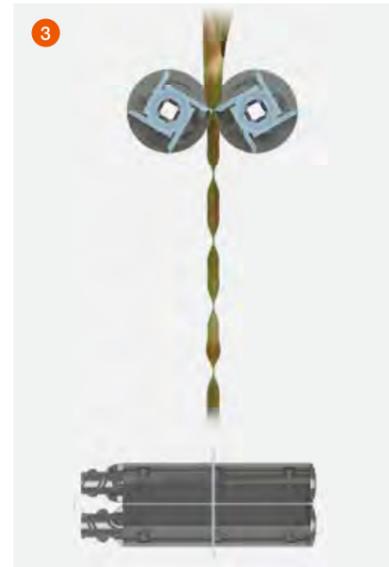

Conical – CORIO CONSPEED.

- Conical snapping rollers
- Hybrid or standard snapping rollers available
- Four bolt-on knives are fitted on the front section of each hybrid snapping roller
- Tungsten-carbide coating ensures high wear resistance
- Horizontal chopper can be switched off

Straight – CORIO.

- Straight snapping rollers (forward mounted bearings)
- Snapping roller knives along entire length
- Four bolt-on knives per snapping roller
- Horizontal chopper is driven continuously

Recommended uses.

Depending on the region and climate, the maturity of the maize plants varies at the time of harvest. CLAAS therefore offers a range of snapping rollers in order to enable the best possible picking performance.

1 With a uniform profile.


This roller shape is particularly suited to dry conditions. The profiles of the two rollers engage and the plants are pulled downwards very gently. In dry conditions, in particular, this arrangement prevents early detachment of the plants.

2 Hybrid snapping rollers.

The special snapping rollers are particularly suited to green crops. Four knives, which aggressively pull the thick stalk sections downwards, are bolted to the front end of each hybrid snapping roller. The rear end of the hybrid snapping rollers has the standard profile.

3 Straight – CORIO.

The straight snapping rollers can be used universally. The throughput speed of the maize stalks remains constant during picking.

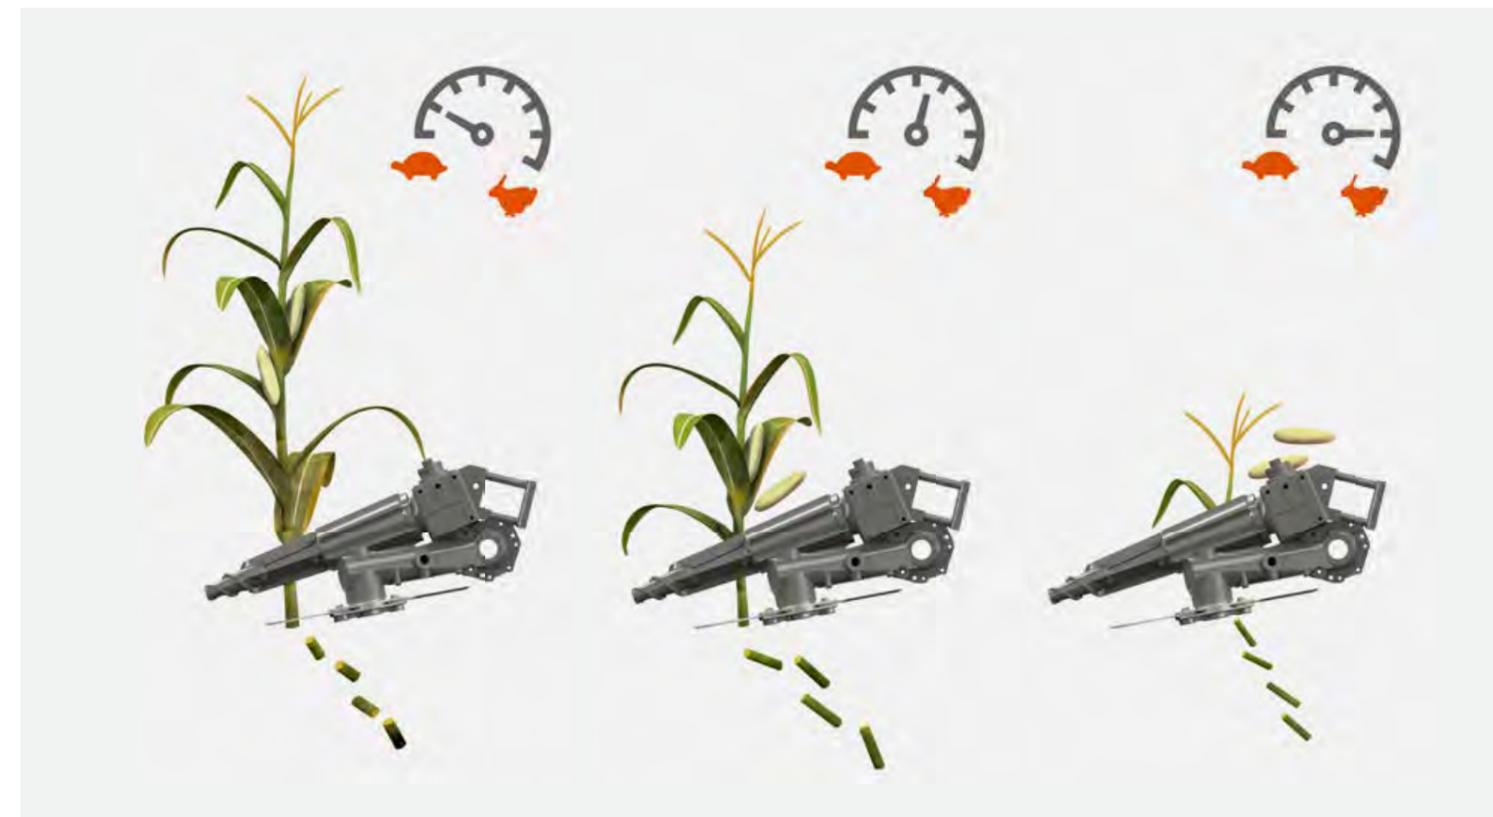

Operating principle of conical rollers.

The key characteristic of the conical snapping rollers is that the speed with which each maize plant is pulled through the rollers increases as the diameter of the roller increases. In this way, even at higher ground speeds, the plant is drawn in gently at first and then more quickly. This means that it is possible to avoid cob losses as well as unnecessary plant residues in the machine resulting from the plants being broken off.

How you benefit.

- Top chop quality thanks to the low throughput speed at the lower end of the maize stalk
- Avoidance of cob losses and damage through breakage thanks to the gradual increase in throughput speed
- Fewer straws and plant residues in the machine mean higher throughput and, therefore, make it possible to attain a higher ground speed





SUNSPEED.

The SUNSPEED sunflower cutterbars impress with their unique picking concept, very high output per unit area with the lowest losses and ease of operation.

The highlights at a glance:

- SUNSPEED sunflower front attachment available as 16, 12 and 8-row units
- Harvests flower heads exclusively - stalk-free picking concept
- The height and speed of the reel can be synchronised to the ground speed conveniently from the cab
- Adjustable guide plates keep the stalks securely in position
- The gap between the shuttles can be adjusted to the stalk thickness
- The shuttles can be adjusted for tilt

Use.

The SUNSPEED sunflower cutterbar is the optimal solution for sunflower harvesting. The unique functional principle enables a significant reduction in both the load on the threshing system and the degree of cleaning required to remove non-grain constituents.

Its high degree of versatility with regard to different row widths and stalk thicknesses makes the SUNSPEED the universal front attachment for sunflowers.



Adjustable shuttles

Technology.

- Knife drive features a low-maintenance oil-bath transmission
- High cutting frequency of 1200 strokes per minute
- Snapping roller and intake auger are driven by chains and belts
- Shuttle width adjustable by up to 20 mm
- Shuttles up to 1800 mm long for even stalk guidance
- Adjustable circumferential reel speed
- Adjustable intake auger speed
- Automatic adjustment of reel speed based on ground speed



Snapping roller




Functional principle.

Once the sunflowers are collected by the shuttles, the adjustable guide plate ensures that the flower heads are pushed forwards. At the same time, the snapping roller below the knife bar pushes the stalks downwards. In this way, the guide plate and snapping roller prevent the stalks from being cut too soon. The cut is not performed until the sunflower heads are captured by the reel. As a result, only the flower heads reach the intake auger which finally delivers them to the feeder housing.

This unique functional principle makes for:

- Lower fuel consumption
- Increased threshing and cleaning performance
- Low wear of all components

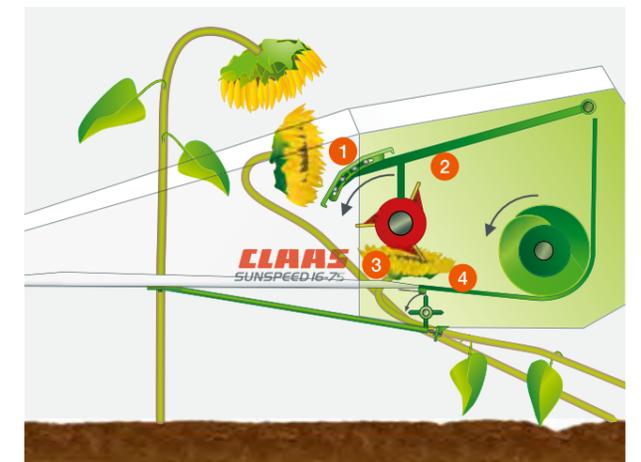

- 1 Adjustable guide plate
- 2 Reel
- 3 Knife bar
- 4 Snapping roller



SWATH UP.

The SWATH UP is the front attachment for clean and reliable swath pick-up.

The highlights at a glance:

- Universal front attachment for different crop types
- Pick-up belts for consistent swath pick-up
- Effective avoidance of stone pick-up thanks to castor guide wheels
- Loss-free crop pick-up
- Working speed is automatically controlled via ground speed



Use.

SWATH UP demonstrates its abilities in areas which are unsuited to direct threshing - and it does so under all imaginable conditions. It enables the pick-up of nearly all windrowed crops, especially crops such as rice, rapeseed and grass seed, and provides yet another demonstration of the exceptional efficiency of CLAAS front attachments.

Functional principle.

The pick-up fingers on the front belt module make for the clean and loss-free collection of the harvested crop. The crop is transferred to the rear belt unit which conveys it to the feed roller. Guide blocks and guide rollers ensure that the belt modules are positioned and tensioned precisely if unevenly loaded, thereby avoiding losses. The feed roller makes for a clean transition to the feeder housing.



Technology.

- Four wide, interlinked pick-up belts form the front belt unit (with pick-up fingers)
- Four wide, interlinked transfer belts form the rear belt unit
- Driven via chains and belts
- Pick-ups controlled by a bevel gear
- Speed of intake units can be adjusted continuously from inside the cab
- The working speed is controlled automatically via the ground speed
- Rake unit is suspended (coil springs and gas-filled spring struts)
- Working depth can be set by castor guide wheels
- Seals between pick-up belts and frame prevent leakage losses



Crop guard.

The crop guard ensures efficient crop flow. It can be adjusted hydraulically for height and is therefore able to adapt optimally to the most diverse conditions. Furthermore, the distance to the rake unit is adjustable.

Castor guide wheels.

The two castor guide wheels at left and right not only limit the depth but also ensure that the tines do not pick up any stones.



The tines ensure the crop is picked up and passed on quickly



Castor guide wheels limit the depth



Standard feeder housing.

The universal feeder housing is compatible with all crops, avoiding unproductive changeover time. A shallow intake angle to the threshing parts facilitates optimal crop flow. Rugged feeder chains with feeder slats ensure high stability while a replaceable wear plate guarantees long service life.

V channel feeder housing.

With the flexible positioning of the cutterbar mount, the V feeder housing facilitates fast, easy adjustment of the cutting angle. This ensures optimal adaptation to all field conditions and different types of tyres.

The feeder housing can be equipped with an additional middle support roller. Greater support of the feeder slats in the guide roller increases stability and optimises the guidance of the chain. In addition, an enclosed guide roller is available for use in dry and low-straw conditions.

Dust extraction at the feeder housing prevents dust from being stirred up immediately in front of the cab in very dry conditions.



HP feeder housing.

The HP (header pitch) feeder housing allows manual or hydraulic adjustment of the cutting angle to adapt to all field conditions. From the central position the cutting angle can be moved 8° back and 11° forward.

MONTANA feeder housing.

Control of the pivoting frame of the feeder housing as well as the cutting angle is based on the axle position of the LEXION MONTANA.



Front attachment drive brake.

Effective protection against foreign bodies and other causes of damage: the drive brake (1) allows the front attachment to be stopped immediately if necessary by means of the multifunction control lever. As the drive brake is fitted directly on the feeder housing, only a small mass has to be braked. This means less braking torque and less wear.

Hydraulic reverse.

Blockages are taken care of easily: the hydraulic system (2) enables protective reversing with high starting torque. The hydraulic reverse can be actuated conveniently with a toggle switch in the cab. The direction of rotation of the hydraulic reel drive also changes automatically, providing additional support for the reversing procedure.

Front attachment interface.

Thanks to their standard interface, CLAAS front attachments can be fitted to LEXION, TUCANO and AVERO machines and are therefore available in all power categories. What's more, they have a whole series of functions and helpful features which allow them to meet even specialised requirements and so offer you outstanding flexibility. Benefit from the unique combination of high-value performance and equipment features.

MultiCoupler.

The central connection coupling for all the hydraulic and electronic connections to the cutterbar.

- You gain valuable time due to shorter attachment and removal procedures
- Integrated design means there is no danger of confusion
- Easy to connect, even under pressure
- Environmentally friendly with no oil leakage

Central locking system.

A single lever on the left side of the cutterbar operates all locks simultaneously.



MultiCoupler and central locking make for extremely convenient operation

Automatic front attachment guidance.

Automatic front attachment guidance.

In order to ensure optimum following of the ground contours, CLAAS front attachments are equipped with the CONTOUR, AUTO CONTOUR and MULTI CONTOUR automatic front attachment guidance systems for ideal results at all times.



CONTOUR.

The cutterbar with CONTOUR adjusts automatically to ground irregularities along the direction of travel.

- CONTOUR = automatic longitudinal adjustment of the front attachment
- The required cutting height can be set via CEBIS
- The active cutting height is controlled by CONTOUR
- Longitudinal control can be overridden by the operator at any time

AUTO CONTOUR.

AUTO CONTOUR goes one step further and also enables automatic compensation for surface irregularities across the direction of travel.

- AUTO CONTOUR = automatic transverse and longitudinal control of the front attachment
- The required cutting height can be set via CEBIS
- The active cutting height is controlled by AUTO CONTOUR
- Transverse and longitudinal control can be overridden by the operator at any time



MULTI CONTOUR.

MULTI CONTOUR enables not only automatic control of the transverse and longitudinal tilt, but also automatic adjustment of the front attachment cutting angle.

- MULTI CONTOUR includes AUTO CONTOUR (transverse and longitudinal tilt control)
- The required cutting angle can be set via CEBIS
- The cutting angle is controlled by MULTI CONTOUR
- The cutting angle as well as the transverse and longitudinal tilt can be overridden by the operator at any time

How you benefit.

- Valve-controlled, nitrogen-filled accumulators ensure optimal shock absorption with front attachments of different weights
- Improved front attachment guidance, especially when operating with wide working widths
- Easier front attachment guidance in laid crops, in darkness and in sloping terrain
- Significant reduction in workload for the operator, enabling greater concentration on threshing



2-way front attachment rams control the ground pressure precisely



CONTOUR, AUTO CONTOUR and MULTI CONTOUR are activated directly on the control lever




Sensor bands detect the position of the front attachment for AUTO CONTOUR and CONTOUR

Convenient front attachment features.



Automated reel control.

- Circumferential reel speed is adjusted automatically in proportion to the ground speed
- Infinitely variable adjustment and storage of reel speed (between forward, synchronous and after-running settings) relative to the ground speed in CEBIS
- Speed settings can be stored in CEBIS
- Hydraulic overload protection prevents damage

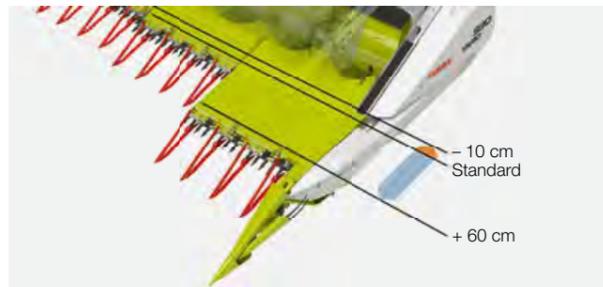

VARIO automation.

- VARIO automation can be switched on or off in CEBIS
- The table length and reel level are then activated or deactivated together

Automatic adjustment.

The operator can use the multifunction control lever to store up to four separate combinations of settings. The currently active and the stored combinations of settings can be viewed continuously in CEBIS.

Each combination of settings consists of:

- Reel height
- Reel levelling setting (VARIO cutterbar)
- Table length (VARIO cutterbar)
- Cutting height (with AUTO CONTOUR)
- Cutting angle (HP feeder housing)

All the individual parameters can be overridden manually by the operator at any time, either by a direct input with the multifunction control lever or via CEBIS.

How you benefit.

- Reduction in operator workload through automatic application of multiple settings
- Optimal adaptation to conditions by means of up to four combinations of settings – for changing crop conditions (such as laid crops / standing crops) or headland operation and edge mowing – which can be saved separately
- Can be overridden by the operator at any time



Automatic parking and transport mode.

- Pressing the cutting height adjustment button causes the cutterbar to move automatically into position for stowage on the trailer
- Table moves to 0 mm position (without rapeseed knives)
- Table moves to 450 mm position (with rapeseed knives)
- Reel moves all the way down and to the rear
- In the case of MAXFLEX cutterbars, the knife bar is set to a rigid configuration electrohydraulically (grain harvesting)
- Activation procedure, which takes place with the threshing unit switched off, varies depending on speed:
 - Above 2 km/h: cutting height adjustment button is pressed once
 - Below 2 km/h: AUTO CONTOUR button is held down



Automatic operating position.

- Pressing the cutting height preselection button causes the cutterbar to move to the last operating position automatically
- Table moves to last operating position
- Reel moves to last operating position
- In the case of MAXFLEX cutterbars, the knife bar is released (no longer set to rigid configuration) electrohydraulically (soybean harvesting)
- Activation procedure varies depending on speed:
 - Above 2 km/h: cutting height adjustment button is pressed once
 - Below 2 km/h: cutting height adjustment button is held down
- Reel moves to last operating position
- Table moves to last operating position

How you benefit.

- Transport and operating positions are reached quickly and easily
- No need to take account of mechanism dependencies



The operator in the cab has a perfect view of the position indicator for the cutterbar tray



Direct inputs with the multifunction control lever are used to activate cutting height adjustment (AUTO CONTOUR), ground pressure control and cutting height preselection as well as to raise / lower the front attachment



The CMOTION multifunction control lever is used to adjust the VARIO cutterbar table, the MAXFLEX knife bar and the MAXFLO conveyor belt speed



The CMOTION multifunction control lever is used to adjust reel parameters (reel height, reel level) and the snapping plate distance of the maize picker



Growing demand for ever greater precision.

The CLAAS front attachments can be equipped with two different automatic guidance systems which can be selected as needed, depending on the job in hand.

LASER PILOT – the electro-optical guidance system
 AUTO PILOT – the electro-mechanical guidance system

You can also choose between the combine's GPS PILOT or GPS PILOT FLEX for your automatic guidance system.



AUTO PILOT, LASER PILOT and GPS PILOT are activated on the CMOTION multifunction control lever

LASER PILOT.

The electro-optical sensors of the LASER PILOT use pulses of light to scan between the crop and stubble and guide the combine harvester automatically along the edge.

The LASER PILOT can be folded away for transport and, depending on the combine model, is available for both the left and right side of the cutterbar. Its optimal positioning on the cutterbar side close to the crop edge enables a good viewing angle and ensures high functional reliability even when working with laid crops, in dusty conditions, on slopes or at night.

How you benefit.

- The LASER PILOT bracket can be adjusted with the panel key without needing tools
- Easily configured via the LED display
- Can be deployed and retracted without the use of tools
- Available for the left and right side of the cutterbar
- High functional reliability, even when operating in laid crops, in sloping terrain or in the dark
- Reduction in workload for the operator, enabling greater concentration on threshing
- Greater precision for mapping areas and yields
- Optimal use is made of the full width of the cutterbar
- Increased seasonal performance



AUTO PILOT.

Two digital sensors incorporated in one of the snapping units detect the position of the combine and automatically guide it through the rows of maize to ensure it is in the optimal position in the crop. In this way, AUTO PILOT contributes to greater performance and increased efficiency.

How you benefit.

- High functional reliability and safety regardless of visibility conditions
- Optimal use of the full width of the cutterbar
- Increased seasonal performance
- Significant reduction in workload for the operator, enabling greater concentration on threshing



AUTO PILOT sensor bands

Front attachment trailers.

Whether operating on roads or farm or field tracks, front attachment trailers from CLAAS enable fast, easy transfers, even between distant fields.

The highlights at a glance:

- Front attachment trailers available ex factory
- Transport speed of up to 40 km
- Integrated transport container
- Twin-axle front attachment trailer with steering rear axle

Single-axle front attachment trailer.

The single-axle transport trailers are available for the 770 to 370 front attachments.

- Available in braked or unbraked versions for 25 km/h or 40 km/h
- A cutterbar equipped with rapeseed knives can be placed on the trailer without any difficulty

The following options are also available ex-factory:

- Marker lights
- Height-adjustable drawbar

Twin-axle front attachment trailer.

The twin-axle front attachment trailers are available for the 1230 to 770 front attachments.

- Available in braked or unbraked versions for 25 km/h or 40 km/h
- Special supports can be fitted to the trailers to allow SUNSPEED, CORIO CONSPEED and CORIO front attachments to be transported without any difficulty
- A cutterbar equipped with rapeseed knives can be placed on the trailer without any difficulty

The following options are also available ex-factory:

- Marker lights



CORIO 1275 C on twin-axle trailer



Locking transport container for rapeseed equipment

Twin-axle front attachment trailer with steering rear axle.

The new twin-axle front attachment trailers with 4-wheel steering are available for the 1230 to 930 front attachments.

- Excellent self-steering characteristics when cornering
- High directional stability
- Available in braked or unbraked versions for 25 km/h or 40 km/h
- The floating front axle can adapt optimally to uneven ground
- Special supports can be fitted to the trailers to allow SUNSPEED, CORIO CONSPEED and CORIO front attachments to be transported without any difficulty
- A cutterbar equipped with rapeseed knives can be placed on the trailer without any difficulty

The following options are also available ex-factory:

- Spare wheel
- Rotating beacon
- LED lights
- Marker lights
- Short or long drawbar

Transport container.

A locking transport container on all attachment trailers allows the rapeseed knives to be carried securely.

Front attachment matrix.

Front attachment	LEXION 700					LEXION 600					TUCANO 500			TUCANO 400				TUCANO 300		AVERO		DOMINATOR
	780	770	760	750	740	670	660	650	630	620	580	570	560	450	440	430	420	340	320	240	160	130
CERIO cutterbars																						
CERIO 930	■	■	■	■	■	■	■	□			■	■	■	■	■							
CERIO 770	■	■	■	■	■	■	■	■	□	□	■	■	■	■	■	■	■	□	□			
CERIO 680							■	■			■	■	■	■	■	■	■	■	■	□	□	
CERIO 620											■	■	■	■	■	■	■	■	■	□	□	
CERIO 560											■	■	■	■	■	■	■	■	■	■	■	
Standard cutterbars																						
C 490													□	□	■	■	■	■	■	■	■	
C 450																						■
C 430															□	□	□	■	■	■	■	
C 420																						■
C 370																	□	□	■	■	■	
VARIO cutterbars																						
VARIO 1230	■ ¹	■ ¹	■ ¹	■ ¹			□ ¹															
VARIO 1080	■	■	■	■	■		□	□														
VARIO 930	■	■	■	■	■	■	■	□			■	■	■	■	■							
VARIO 770	■	■	■	■	■	■	■	■	□	□	■	■	■	■	■	■	■	□	□	□		
VARIO 680							■	■			■	■	■	■	■	■	■	■	■	■	■	
VARIO 620											■	■	■	■	■	■	■	■	■	■	□	
VARIO 560											■	■	■	■	■	■	■	■	■	■	■	
VARIO 500												■	■	■	■	■	■	■	■	■	■	
MAXFLEX cutterbars																						
MAXFLEX 1200	■ ¹	■ ¹	■ ¹	■ ¹			□ ¹															
MAXFLEX 1050	■	■	■	■	■	■	■	■														
MAXFLEX 930	■	■	■	■	■	■	■	■			■	■	■	■	■							
MAXFLEX 770	□	□	□	□	□	■	■	■	□	□	■	■	■	■	■	■	■	□	□	□		
MAXFLEX 620							□	□	□		■	■	■	■	■	■	■	■	■	■	■	
MAXFLEX 560							□	□	□		■	■	■	■	■	■	■	■	■	■	■	
CONVIO FLEX cutterbars																						
CONVIO FLEX 1230	■ ¹	■ ¹																				
CONVIO FLEX 1080	■	■	■	■		■	■															
CONVIO cutterbars																						
CONVIO 1230	■ ¹	■ ¹																				
CONVIO 1080	■	■	■	■		■	■															
Folding cutterbars																						
C 540							□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
C 450							□	□	■	■	□	□	□	■	■	■	■	■	■	■	■	

■ Recommended □ Not recommended

¹ TERRA TRAC only
² Not approved for LEXION MONTANA

Front attachment	LEXION 700					LEXION 600					TUCANO 500			TUCANO 400				TUCANO 300		AVERO		DOMINATOR								
	780	770	760	750	740	670	660	650	630	620	580	570	560	450	440	430	420	340	320	240	160	130								
CORIO 12-row																														
CORIO 1275 C CONSPEED	■	■	■ ²	■ ²	■																									
CORIO 1270 C CONSPEED	■	■	■ ²	■ ²	■																									
CORIO 8-row unit																														
CORIO 890 CONSPEED	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 880 FC CONSPEED	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 880 FC	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 875 C CONSPEED	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 875 FC CONSPEED	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 875 C	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 875 FC	■	■	■	■	■	■ ²	■	■	■	□	■	■	■	■	■															
CORIO 870 C CONSPEED	■	■	■	■	■	■ ²	■	■	■	■	■	■	■	■	■															
CORIO 870 FC CONSPEED	■	■	■	■	■	■ ²	■	■	■	■	■	■	■	■	■															
CORIO 870 C	■	■	■	■	■	■ ²	■	■	■	■	■	■	■	■	■															
CORIO 870 FC	■	■	■	■	■	■ ²	■	■	■	■	■	■	■	■	■															
CORIO 6-row unit																														
CORIO 690 CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■									
CORIO 680 FC CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 680 FC											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 675 C CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 675 FC CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 675 C											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 675 FC											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 670 C CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 670 FC CONSPEED											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 670 C											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 670 FC											■ ²	■	■	■	■	■	■	■	■	■	■	■								
CORIO 5-row unit																														
CORIO 575 C																						□	□	□	□	□	□	■	■	
CORIO 570 C																							□	□	□	□	□	□	■	■
CORIO 4-row unit																														
CORIO 475 C																												■	■	
CORIO 470 C																												■	■	
CORIO 475 C ¹																													■	
CORIO 470 C ¹																													■	
SWATH UP																														
SWATH UP 450	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■								
SUNSPEED																														
SUNSPEED 16-70	■	■	■ ²	■ ²	■	■ ²	■	■																						
SUNSPEED 12-75	■	■	■ ²	■ ²	■	■ ²	■	■	■ ²	■	■	■	■	■	■	■	■	■	■	■	■	■								
SUNSPEED 12-70	■	■	■ ²	■ ²	■	■ ²	■	■	■ ²	■	■	■	■	■	■	■	■	■	■	■	■	■								
SUNSPEED 8-75																■	■	■	■	■	■	■	■	■	■	■	■	■		
SUNSPEED 8-70																■	■	■	■	■	■	■	■	■	■	■	■	■		

Please note that these recommendations are not valid for all regions. The regional road traffic regulations must be observed. The front attachment matrix may vary as a result of differing climatic conditions or cultivation methods.

The availability of individual combine harvester models depends on the applicable emissions standard for the country concerned and can therefore vary subject to national regulation.

How you benefit.



Standard cutterbars.

- Proven rigid cutterbar table
- For DOMINATOR and AVERO

CERIO.

- Cutterbar table has an overall manual adjustment range of 200 mm
- Simple alternative to VARIO cutterbar
- Suitable for rice

VARIO.

- Cutterbar table is unique in having an infinitely variable overall adjustment range of 700 mm
- 10% more throughput thanks to adjustable table position
- Plug & Play for rapeseed.
- Cutterbar table with integrated rapeseed plates
- Suitable for rice

MAXFLEX.

- Optimal adaptation to ground contours for crops close to the ground
- 180 mm flexible knife bar, can be set to rigid configuration hydraulically for soybeans and grain

CONVIO FLEX / CONVIO.

- Optimal crop flow as a result of AUTOMATIC BELT SPEED
- Genuine multicrop capability for harvesting grains, rapeseed, soybeans, grass seed, etc.
- CONVIO FLEX with 225 mm flex range
- Extremely flat approach angle for minimal crop losses

Folding cutterbars.

- No additional trailer necessary
- Transport width of 3.0 m
- Full AUTO CONTOUR capability

CORIO CONSPEED / CORIO.

- Various picking concepts with CORIO CONSPEED and CORIO
- Large working widths from 12 to 4-row units
- Row widths of 90, 80, 75 and 70 cm
- Sunflower kits available

SUNSPEED.

- Harvests flower heads exclusively – stalk-free picking concept
- Large working widths from 16 to 8-row units

SWATH UP.

- Optimal swath pick-up characteristics
- Universal front attachment for different crop types
- Extremely efficient swath pick-up

Equipment.

- Automated reel control and VARIO automation
- Automatic front attachment guidance by CONTOUR, AUTO CONTOUR and MULTI CONTOUR
- Automatic adjustment
- Automatic guidance systems
- Automatic parking and transport mode
- Automatic operating position

		CONVIO FLEX / CONVIO cutterbars		VARIO cutterbars							CERIO cutterbars					Standard cutterbars					Folding cutterbars		
		1230	1080	1230	1080	930	770	680	620	560	500	930	770	680	620	560	C 490	C 450 ¹	C 430	C 420 ¹	C 370	C 540	C 450
Effective cutting width	mm	12260	10740	12270	10740	9220	7696	6781	6172	5562	4953	9220	7696	6781	6172	5562	4920	4550	4320	4240	3710	5460	4550
Effective cutting width	ft.	40.22	35.24	41.00	35.25	30.25	25.25	22.25	20.25	18.25	16.25	30.25	25.25	22.25	20.25	18.25	16.14	14.93	14.17	13.91	12.17	17.91	14.93
Drive on both sides		●	●	●	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	●	●
Drive on one side		–	–	–	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–
Grain crop divider, folding		○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Crop dividers adjustable for height without tools		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–	–	–	–	–	–
Soybean crop divider		●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Spacing of knife bar to intake auger (min. / max)	mm	–	–	493 / 1134	493 / 1134	493 / 1134	493 / 1134	493 / 1134	493 / 1134	493 / 1134	493 / 1134	579	579	579	579	545	560	560	580	545	560	560	
Knife divided		–	–	●	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	●	●
Knife undivided		●	●	–	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–
MULTIFINGER intake auger		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Reel and auger bearing divided		●	●	●	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	●	●
Reel and auger bearing undivided		–	–	–	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	–	–
Crop lifters		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Vertical flexibility of knife bar	mm	225	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
ACTIVE FLOAT		●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Intake auger diameter (ext. / int.)		620 / 420	620 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420	660 / 420
Replacement knife		●	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	●	●
possible adjustment range, hydraulic	mm	–	–	700	700	700	700	700	700	700	700	–	–	–	–	–	–	–	–	–	–	–	
possible adjustment range, manual	mm	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Side belt depth	mm	1079.50	1079.50	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Trough depth	mm	1329	1329	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Width of centre belt	mm	2000	2000	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Weight (without rapeseed equipment)	kg	4350 / 4300	4050 / 4000	4055	3665	2989	2557	2334	2224	2093	1941	2824	2419	2140	2040	1926	1300	1080	1120	1000	940	2100	1980

Automated cutterbar control

CONTOUR	–	–	–	–	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
AUTO CONTOUR	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
AUTO CONTOUR FLEX	○	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Automatic parking position	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Automatic operating position	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Reel torque control	●	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Reel speed control	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Automatic reel height	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Automatic reel levelling	●	●	●	●	●	●	●	●	●	●	●	–	–	–	–	–	–	–	–	–	–	–	–
Automatic table control	–	–	●	●	●	●	●	●	●	●	●	–	–	–	–	–	–	–	–	–	–	–	–
AUTOMATIC BELT SPEED	○	○	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
LASER PILOT	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Rice equipment

Intake auger wear protection	–	–	–	–	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Rice harvesting system	–	–	–	–	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Dual knife system	–	–	–	–	–	–	–	–	–	–	–	–	–	–	○	–	○	–	–	–	–	–	–

Rapeseed equipment

Rapeseed knives	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Rapeseed plates	–	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Spacing: knife bar – intake auger	mm	–	–	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134
possible adjustment range with rapeseed equipment	mm	–	–	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150
Feed auger	○	○	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Raised rear wall	○	○	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

¹ DOMINATOR only

Front attachments		MAXFLEX cutterbars					
		1200	1050	930	770	620	560
Effective cutting width	mm	11960	10440	9220	7696	6172	5563
Effective cutting width	ft.	40.00	35.00	30.25	25.25	20.25	18.25
Drive on both sides		●	●	–	–	–	–
Drive on one side		–	–	●	●	●	●
Vertical flexibility of knife bar	mm	180	180	180	180	180	180
Knife divided		●	●	–	–	–	–
Knife undivided		–	–	●	●	●	●
MULTIFINGER intake auger		●	●	●	●	●	●
Reel and auger bearing divided		●	●	–	–	–	–
Reel and auger bearing undivided		–	–	●	●	●	●
Crop lifters		○	○	○	○	○	○
Replacement knife		●	●	●	●	●	●
Rapeseed knives		–	–	–	–	–	–
Additional feed augers		–	–	–	–	–	–
Weight	kg	3750	3395	2671	2289	1885	1768

Automated cutterbar control						
CONTOUR	○	○	○	○	○	○
AUTO CONTOUR	○	○	○	○	○	○
Automatic parking position	–	–	●	●	●	●
Automatic operating position	–	–	●	●	●	●
Reel speed control	●	●	●	●	●	●
Automatic reel height	●	●	●	●	●</	

Front attachments	CORIO CONSPEED 12-row		CORIO CONSPEED 8-row						CORIO CONSPEED 6-row						CORIO 8-row		CORIO 6-row				CORIO 5-row		CORIO 4-row								
	1275 C	1270 C	890	880 FC	875 C	875 FC	870 C	870 FC	690	680 FC	675 C	675 FC	670 C	670 FC	880 FC	875 C	875 FC	870 C	870 FC	680 FC	675 C	675 FC	670 C	670 FC	575 C	570 C	475 C	470 C	475 C ¹	470 C ¹	
Number of rows	12	12	8	8	8	8	8	8	6	6	6	6	6	6	8	8	8	8	8	6	6	6	6	6	5	5	4	4	4	4	
Row width	cm	75	70	90	80	75	75	70	70	90	80	75	75	70	70	75	75	70	70	80	75	75	70	70	75	70	75	70	75	70	
Transport position – rigid		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Transport position – folding		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Horizontal chopper		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Working width	m	9.78	8.63	7.17	6.53	6.18	6.18	5.83	5.83	5.37	4.93	4.68	4.68	4.43	4.43	6.53	6.18	6.18	5.83	5.83	4.93	4.68	4.68	4.43	4.43	3.93	3.73	3.18	3.03	3.18	3.03
Transport width	m	9.78	8.63	7.17	3.35	6.18	3.00	5.83	3.00	5.37	3.35	4.68	3.00	4.43	3.00	3.35	6.18	3.00	5.83	3.00	3.35	4.68	3.00	4.43	3.00	3.93	3.73	3.18	3.03	3.18	3.03
Stubble breaker		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MONTANA mounting kit ²		–	–	–	○	○	○	○	○	–	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Sunflower kit		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Hood extensions		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Laid maize augers		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Shear bar kit		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Sprocket for intake auger speed increase		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Electrohydraulic snapping plate adjustment		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Intake auger loss protection		●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Road transport protection incl. lighting and safety bar		–	–	–	●	–	●	–	●	–	●	–	●	–	●	–	●	–	●	●	–	●	–	●	–	–	–	–	–	–	–
Support for trailer		○	○	○	–	○	–	○	–	○	–	○	–	○	–	○	–	○	–	○	–	○	–	○	–	○	○	○	○	○	
Weight	kg	3820	3700	2750	2990	2590	2910	2510	2855	2150	2355	2030	2295	2030	2295	3110	2710	3030	2630	2950	2445	2120	2385	2120	2385	1770	1770	1475	1475	1460	1460

Automated cutterbar control

AUTO CONTOUR	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
AUTO PILOT	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



Ensuring a better **harvest.**

CLAAS KGaA mbH
 Mühlenwinkel 1
 33428 Harsewinkel
 Deutschland
 Tel. +49 5247 12-0
 claas.com

¹ For DOMINATOR 130 only

² Suitable for LEXION 760 / 750 and 630 MONTANA, not suitable for LEXION 670 MONTANA