



Mowers




DISCO

Front and large-scale mowers



DISCO.

Makes mowing a pleasure.

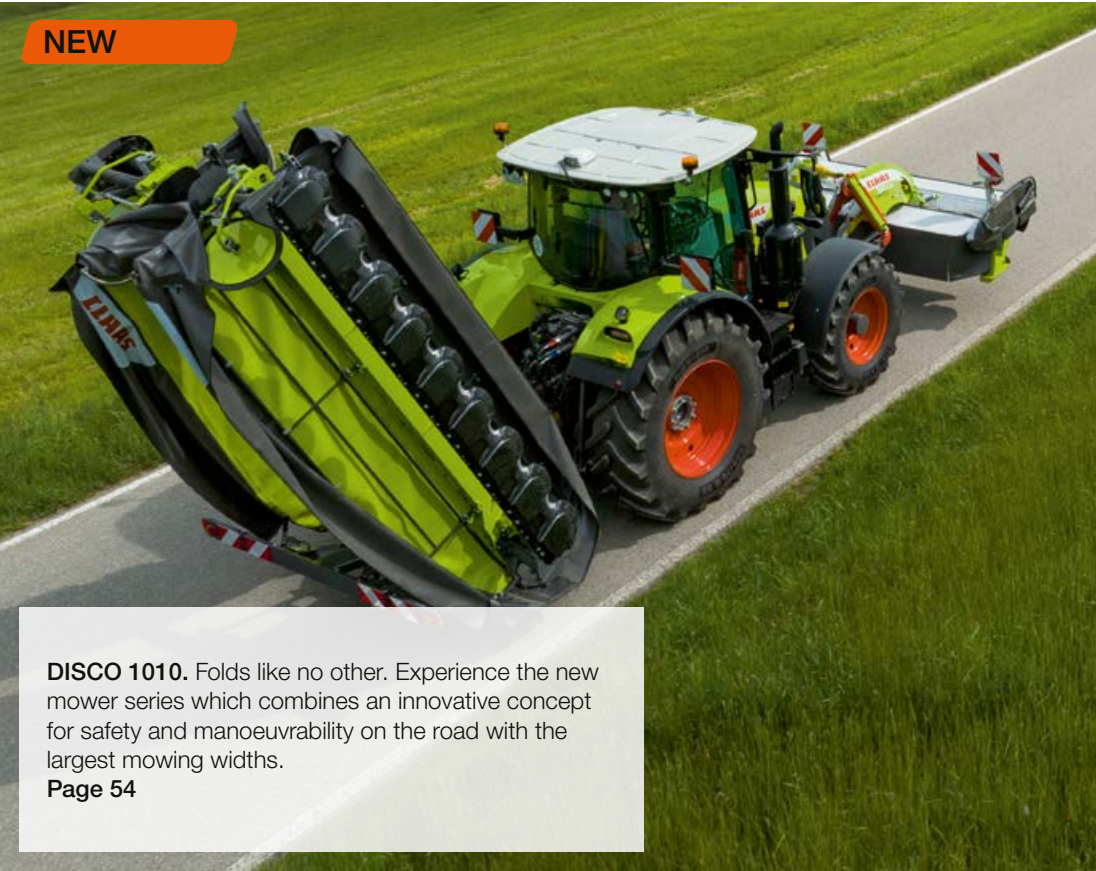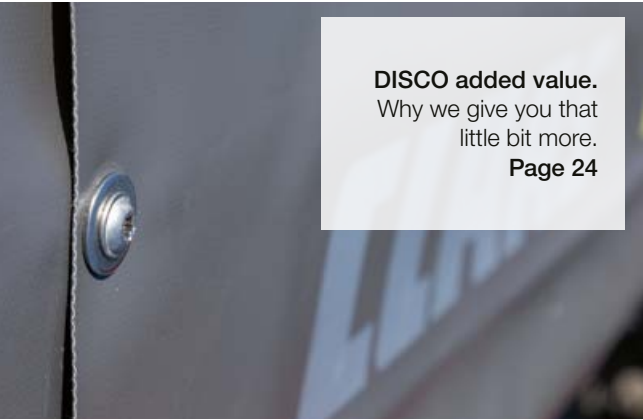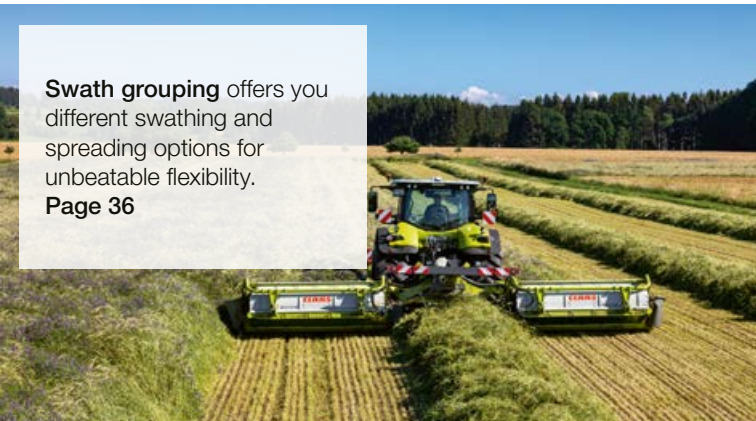

Product overview	4
Technology for professionals	6
MAX CUT mower bed	10
Conditioners	18
User friendliness	20
Suspension pressure and speed reduction	22
DISCO added value	24
Large-scale mowers	26
Overview	28
Operation	30
Reverse drive	32
DISCO 9400 C DUO	34
Swath grouping	36
DISCO 9200 C AUTOSWATHER	38
With conditioner	42
DISCO 1100 C / RC 9200 C BUSINESS	44
DISCO 9200 C / RC 8500 C / RC CONTOUR	48
Without conditioner	50
DISCO 1100 TREND	52
DISCO 1010 TREND COMFORT	54
DISCO 9300 8500 TREND	58
Front mowers	60
Overview	62
DISCO MOVE	64
DISCO PROFIL	66
DISCO 3150 F	68
Deer protection	70
CLAAS Service & Parts	72
Specifications	75

Looking for a mower?
We can help you.

Front mowers		
DISCO MOVE		
3600 F / FC / FRC	3.40 m	
3200 F / FC / FRC	3.00 m	
– MAX CUT mower bed – Speed reduction – 3D ground-contour following with pivot point close to the ground (vertical movement independent of tractor) – ACTIVE FLOAT hydropneumatic suspension		
DISCO PROFIL		
3600 F / FC / FRC	3.40 m	
3200 F / FC / FRC	3.00 m	
– MAX CUT mower bed – Speed reduction – 3D ground-contour following with pivot point close to the ground – ACTIVE FLOAT hydropneumatic suspension (optional) – Spring suspension		
DISCO compact series		
3150 F	3.00 m	
– MAX CUT mower bed – Speed reduction – 2D ground contour following – ACTIVE FLOAT hydropneumatic suspension (optional) – Spring suspension		

Rear mowers		
DISCO CONTOUR		
4400	4.20 m	
4000	3.80 m	
3600 / C / RC	3.40 m	
3200 / C / RC	3.00 m	
2800 / C / RC	2.60 m	
– MAX CUT mower bed – Speed reduction – Centrally pivoted – ACTIVE FLOAT hydropneumatic suspension – Vector folding for transport position with DISCO 4400		
DISCO 100 series		
360	3.40 m	
320 / C	3.00 m	
280 C / RC	2.60 m	
240 RC	2.20 m	
– MAX CUT mower bed – Speed reduction – Side suspension – Centre of gravity suspension		
DISCO 10 series		
32	3.00 m	
28	2.60 m	
24	2.20 m	
– MAX CUT mower bed – Speed reduction – Side suspension – Centre of gravity suspension		

Trailed mowers		
DISCO CONTOUR with central drawbar		
4000 TC / TRC CONTOUR	3.80 m	
3600 TC / TRC	3.40 m	
3200 TC / TRC	3.00 m	
– MAX CUT mower bed – Speed reduction – Centrally pivoted – ACTIVE FLOAT hydropneumatic suspension		
DISCO compact series with side drawbar		
3150 TC / TRC	3.00 m	
– MAX CUT mower bed – Speed reduction – Suspended on both sides – Spring suspension		
Further information on these models can be found in the DISCO front, rear and trailed mowers brochure.		

Large-scale mowers		
DISCO DUO for reverse mode		
9400 C	9.10 m	
– MAX CUT mower bed – Speed reduction – For tractors with reverse-drive system – ACTIVE FLOAT hydropneumatic suspension with automatic control – Hydraulic non-stop collision protection – Load sensing and ISOBUS compatibility		
DISCO AUTOSWATHER with swath grouping		
9200 C	9.10 / 8.90 m	
– MAX CUT mower bed – Speed reduction – Swath grouping – ACTIVE FLOAT hydropneumatic suspension with automatic control – Hydraulic non-stop collision protection – Load sensing and ISOBUS compatibility		
DISCO BUSINESS		
1100 C / RC	9.40–10.70 m	
9200 C	9.10 / 8.90 m	
– MAX CUT mower bed – Speed reduction – Infinitely variable working width in the DISCO 1100 BUSINESS – ACTIVE FLOAT hydropneumatic suspension with automatic control – Hydraulic non-stop collision protection – Load sensing and ISOBUS compatibility		
DISCO COMFORT		
1010	9.90 / 9.70 m	
– MAX CUT mower bed – Speed reduction – ACTIVE FLOAT hydropneumatic suspension – Load sensing (ISOBUS compatibility) and hydraulic spool valves – Vector folding for transport position		
DISCO CONTOUR		
9200 C / RC	9.10 / 8.90 m	
8500 C / RC	8.30 / 8.10 m	
– MAX CUT mower bed – Speed reduction – ACTIVE FLOAT hydropneumatic suspension – Pre-selection hydraulics – ISOBUS compatibility		
DISCO TREND		
1100	9.40–10.70 m	
1010	9.90 / 9.70 m	
9300	9.10 / 8.90 m	
8500	8.30 / 8.10 m	
– MAX CUT mower bed – Speed reduction – Infinitely variable working width in the DISCO 1100 BUSINESS – ACTIVE FLOAT hydropneumatic suspension – Direct operation via tractor spool valve – Vector folding for transport position in the DISCO 1010		

Key:
no additional letter = without conditioner
F = front mower
C = tine conditioner
RC = roller conditioner
T = trailed mower

MAX CUT for all.

With the introduction of the MAX CUT mower bed, CLAAS revolutionised mower technology and redefined the state of the art. MAX CUT is now fitted on all DISCO models, whether large or small. An ingeniously designed, bolted mower bed with a distinctive wave shape.

MAX CUT benefits at a glance:

- Specially shaped to give a clean cut
- Reliable, robust drive train
- Safety module in the event of collision
- Wear-resistant components
- Permanently lubricated and therefore maintenance-free





People all over the world are raving about the DISCO. Worldwide.

Gabriele Gambini, contractor, Italy



“The new bed is great, because it does the job reliably in any situation.”

Masanori Mukai, farm manager, Nobels Farm, Japan



“As well as being a great machine to work with, it’s also amazingly maintenance-friendly. What surprised me most of all with the DISCO was that it doesn’t leave any cutting marks behind. ACTIVE FLOAT keeps on working reliably even on uneven ground.”

Reuben Woods, Emdavale Farms Yerecoin, Western Australia



“We have used a combination of a DISCO 1100 RC BUSINESS and a 3600 FRC PROFIL for three seasons now, mowing around 2,200 hectares of export oat hay a year. We used to run three trailed mowers, which we have now replaced with this mowing combination. The factors in making that decision include ease of maintenance, reliability and low repair costs. We need less fuel, fewer people, and now we have more tractors available for baling. We are really impressed at how productive we can be with just one driver.”

Andreas Holzhauer, agricultural equipment hire pool, Germany



“As well as providing excellent mowing results on sloping terrain, the slope control system is more user-friendly for the operator, thanks to the self-adjusting settings.”

Didier Grasset, farmer, France



“We are very satisfied with the new mower bed. As well as the quality of cut, we like the low costs and ease of maintenance.”

Maximilian Stockmeyer, farmer, Germany



“The DISCO MOVE is an incredibly light-footed, compact mower with impressive ground-contour following and an immaculate cut.”

Jaakko Suominen, Venna Ltd, Finland



“Venna is a 400-hectare organic dairy farm. The welfare of our animals and quality of our feed are fundamental to our approach. Top quality grass, mowed at just the right time, is extremely important in the production of organic milk – the raw material for our organic ice-cream. The performance and quality of CLAAS products have lived up to our expectations.”

MAX CUT – always a cut above the rest.

Because every blade of grass counts.

All mower beds are much the same, aren't they? Well, no actually – take a closer look!

With the development of the unique MAX CUT mower bed, CLAAS revolutionised mowing technology and redefined the state of the art. It is this proven engineering that has made the DISCO such a successful product.

The standout feature of the mower bed is its wave-shaped base plate which enables the wear-resistant mowing discs to be positioned well to the front. Together with different shaped inserts for the converging and diverging discs, this guarantees maximum overlap and the perfect cut.

For us, it's not just your performance in the field that counts – the quality of your forage is really important too. Take a closer look at the underside of our mower bed to see how we achieve this. The tunnel effect is amplified by special spoilers designed to deflect dirt downwards. No dirt in the forage means premium forage quality for you!

MAX CUT mower beds range from 2.20 to 4.20 metres wide. They are found in every one of our mowers, from the smallest to the largest. They can even be installed in the DIRECT DISC to supply the JAGUAR.

We like to take charge of quality in house – because only the best is good enough. Made in Bad Saulgau.



What lies at the heart of your DISCO mower? The MAX CUT mower bed.



Unique drive concept.

The MAX CUT mower bed combines the benefits of several different drive concepts, making it truly one of a kind, and more efficient than any other mechanism. The wave shape allows the large satellite gears of the mowing disc to be placed well to the front, engaging at two points with multiple teeth. Uniform disc spacing ensures a perfect cut pattern under all operating conditions. The MAX CUT mower bed is permanently lubricated, and is therefore maintenance-free.

- 1 Unique wave-shaped base plate pressed from a single piece of steel
- 2 Mowing discs further to the front, with knives rotating 360°
- 3 Optimum tunnel effect, further increased by skids with spoiler action
- 4 Innovative bolting concept for maximum deflection and impact resistance
- 5 Permanently lubricated maintenance-free mower bed for maximum service life
- 6 SAFETY LINK safety modules protect the mower bed in the event of collisions
- 7 Hardox inserts between skids for a clean cut
- 8 Very small mower bed openings for maximum strength



Steel Innovation Award in 2018
for the MAX CUT mower bed




Wave-shaped pressed mower bed base plate.

The core structure of the MAX CUT mower bed is the wave-shaped base plate, formed from a single piece of steel with a pressing force of 3,000 t. This is what gives the mower bed its underlying strength and unique technical capabilities. The wave-shaped design is the perfect solution for satisfying the demands of a modern mower bed efficiently and without compromise.



The MAX CUT mower bed received the 2018 Steel Innovation Award for the unique design of its base plate, which uses micro-alloy fine-grain steel and is weld-free to avoid weak points.

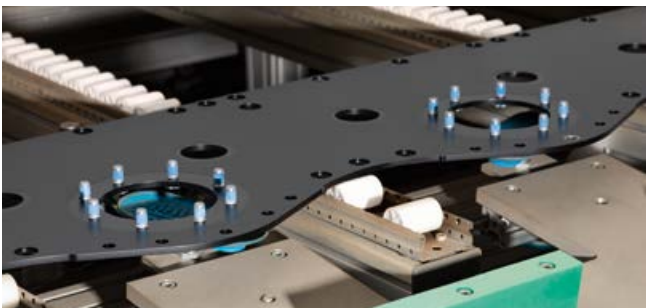

Strong mower bed cover plate.

The special wave shape maximises the mower base cross-section, while the very small module openings in the cover plate ensure outstanding strength and resilience.



Bolted instead of welded.


Another secret of the MAX CUT mower bed's success: the mower base and cover plate are machined together from the outset, ensuring that the two halves are a perfect match. The innovative bolting concept provides perfect positive locking, while the absence of welds that can potentially create weak points delivers maximum bending and impact resistance.



"Durability was one of the key requirements for the development of the MAX CUT mower bed. We therefore opted for a bolting concept with special positive-locking knurled screws, providing an impact-resistant and durable connection between the base and the cover plate."

DISCO and mower bed development engineer Martin Ober

Ultra-high-precision engineering.
It's the details that make the difference.

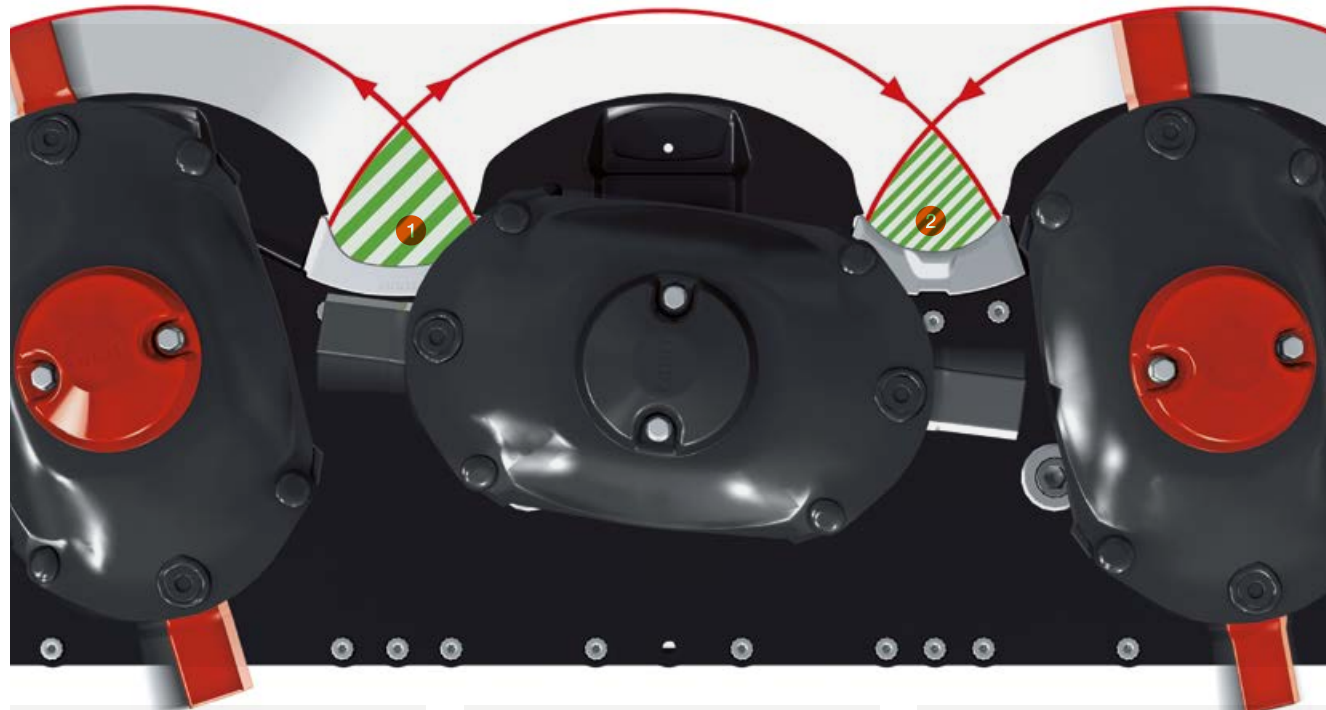

Inserts with or without shear bar make a big difference.

The distinctive wave shape provides the basis for another piece of technical ingenuity – by creating space for two different-shaped hardox inserts. These increase the cutting surface and ensure maximum overlap between the circular knife paths to deliver the perfect cut.

- 1 As the knives move together, an insert effectively protects the bed from cutting damage. This insert also has a slightly raised section which functions as a shear bar and prevents soiling.
- 2 As the knives move apart, a slim-line insert causes them to emerge slightly earlier from the mower bed, maximising the overlap between the circular knife paths at this point. The special shape also ensures optimum crop flow.



Clear-cut – because the customer is king.

From the 2022 financial year, mowing discs that rotate anti-clockwise will have a red cap and the corresponding blades will also be painted red. This will simplify knife changes, save time and guarantee a clean cut.



Tunnel effect for a clean crop.

Specially shaped extra-wide skids acts as spoilers to deflect the dirt, as well as protecting the mower bed base. The distinctive wave shape means that the skids are supported well to the front, giving them additional stability.




Large drive gears.

Ultra-fine ground large-size drive gears provide highly efficient transmission. Because of their size, they turn much more slowly than the satellite gears of the mower discs, which are placed well to the front. As a result, the mower bed runs quietly, with very little wear.



Wear protection for the knife carriers.

The knife carriers feature a high-quality tungsten carbide coating on the outside for optimum wear protection.

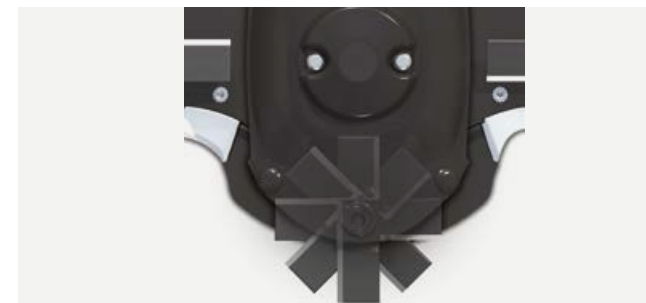

Knives rotate freely through 360°.

Long and sharp, yet safe: the freely rotating knives deflect obstacles without damaging their reverse sides. As a result, they can always be used on both sides before being replaced.



Smart mower disc design.


The special shape ensures optimum crop flow and maximum wear resistance. Additional wear bolts protect the oblique surfaces. The special carbide scraper on the bottom of the mower disc helps to minimise the accumulation of dirt on the mower bed, as well as the starting torque.

Minimal wear for long-lasting performance.



Endurance test in alfalfa, passed with flying colours.

The French dried crop product specialist Luzéal cut and conditioned about 20,000 hectares of alfalfa with a DISCO mower combination over two years of harvesting at their Saint-Remy-sur-Bussy site. The company produces about 162,000 tonnes of dry alfalfa a year in the form of pellets and bales from six locations. With the exception of a single SAFETY LINK module, which was shorn off during a collision, there were no workshop downtimes. Site manager Hughes Dubreuil's final verdict couldn't be more positive: "We're very impressed by the quality of work and reliability of the mower combination and MAX CUT mower bed."

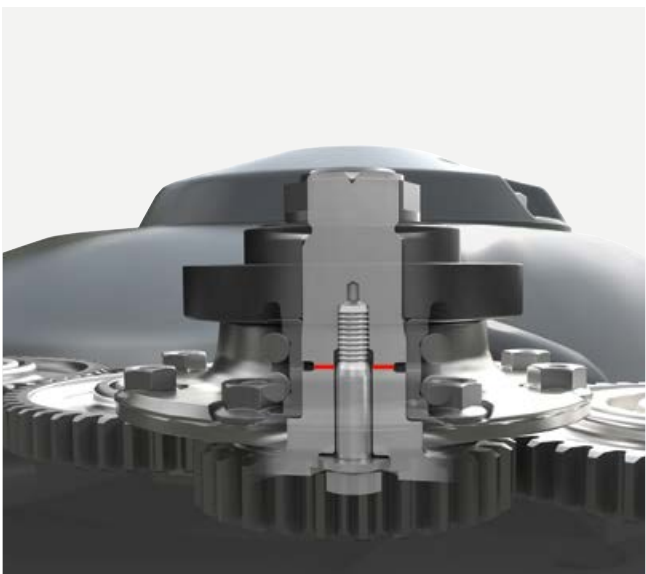

SAFETY LINK safety module.

Every mower disc in the MAX CUT mower bed is protected by a defined shear point in the safety module. In the event of a collision, the mower disc is isolated from the drive train, and an axial bolt holds the disc in place to prevent it flying off into the air. The large-sized satellite gears ensure that multiple teeth are always engaged and reliably accommodate load spikes. And for maximum service life, there is a very large, double-groove ball bearing with a long bearing distance, with extra sealing protection. Furthermore, the mowing discs are arranged so that they cannot collide.



Maximum protection for special conditions.

For particularly large hectare performance or in abrasive conditions, the MAX CUT mower bed can be fitted with optional wear skids. These are also available in a 15 mm higher version. An additional mower bed guard for the skid gap is also available especially for intensive use in tough conditions (e.g. in alfalfa).



High or higher? We have the skids you need.

For a higher cut, optional high or double-high skids can simply be bolted on as required to increase the cut height by 30 mm or 60 mm respectively. The unique angled shape provides a very large skid contact area for various cut heights.

Saving you time. The conditioner.



Tine conditioner.

Tine conditioners with V-shaped tines in a spiral configuration are ideal for harvesting grass crops. Conditioning intensity is set via a baffle plate. Flexible mounting allows the tines to deflect and pass around any objects that find their way into the conditioner – stones, for example. This avoids repair costs. The mown crop can also be spread over the entire working width with an optional wide crop spreader, or deposited in a single swath with adjustable swathing plates.




Roller conditioner.

Leafy crops such as alfalfa call for protective conditioning. The aim is to crush the stalks without destroying the leaves and thus wasting them. This is where the DISCO mowers with roller conditioner come into their own. The durable, polyurethane V-shaped interlocking rollers crush the hard stalks while protecting the leaves. The conditioning intensity can be adjusted via a spring-preload mechanism. Adjustable swathing plates allow for variable swath formation.



Tine alignment tool and fitting aid.

The tine alignment tool makes it easy to realign tines that have become bent due to the impact of foreign objects. Any worn tines can be quickly replaced using the fitting aid.

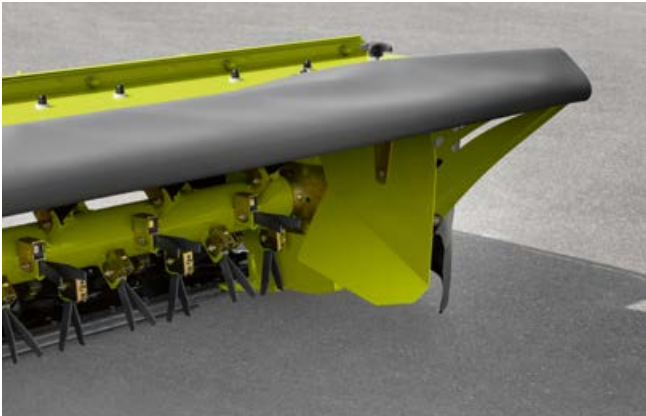


Wide crop spreader and swathing plates.

The optional wide crop spreader for mowers equipped with a tine conditioner ensures that crops are spread evenly across the full working width. Variable swathing plates allow you to respond comfortably to different forage volumes and set the swathing width flexibly.



Feed drums.

The outside mowing discs are fitted with feed drums for optimum crop flow.

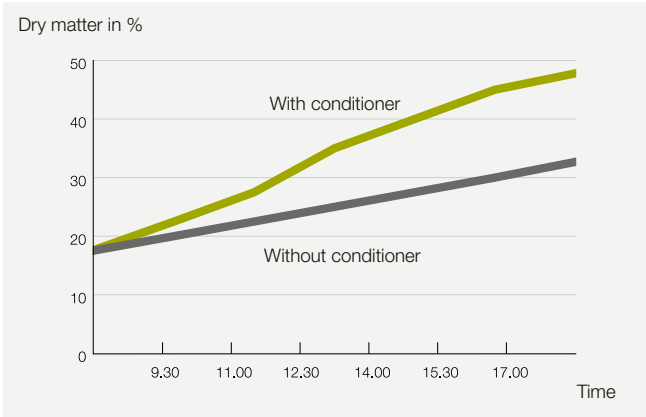

Outsmarting the weather.

Conditioner mowers can significantly reduce wilting and drying time to make the most of very short harvesting windows. You also save on the time required for crop spreading operations. So CLAAS offers mowers from working widths of 2.60 metres with tine and roller conditioners.



Swathing discs.

Models without a conditioner can be fitted with swathing discs for optimum swath formation.

Beautifully designed. Right down to the last detail.

Quality you can rely on.

DISCO mowers are designed to withstand maximum loads over long periods, while consistently delivering top-quality cutting results. They are easy to use and maintain outstanding efficiency even at minimum power input. All maintenance work can be carried out quickly and easily, and attaching and detaching implements has never been easier.



Easy and efficient hitching.

All DISCO large-scale mowers have lower link guides to ensure stress-free mowing, right from the start.



No risk of confusion.

Colour-coded Kennfixx hydraulic connectors are easy to connect, whether with or without magnetic bracket.



Quick knife change.

Knives can be replaced in next to no time using the fitting lever provided. A knife box provides convenient storage for used and replacement knives. The mower has a dedicated bracket for both the fitting lever and knife box.

Quality – down to the last bolt.

The first signs of wear are normally seen on the safety frames – so we use special stainless steel frames on DISCO large-scale mowers. The bolts attaching the protective covers are also made of stainless steel, ensuring easy removal when required.



Spotless oil changes.

For no-mess oil changes, every CLAAS rear mower comes with an oil can with two filler necks, designed to fit the filling and drainage openings.



Easy access.

The bed is super-easy to access for cleaning and maintenance work in all models. Convenient hooks are provided for securing the protective covers.



Drive shaft.

The drive shafts of all DISCO mowers feature an innovative protection and lubrication system. Ease of access was also a key design objective. A 250-hour lubrication interval makes for significantly easier maintenance.



Outstanding engineering for forage quality and cost-efficiency



Frictional resistance transformed into rolling resistance.

ACTIVE FLOAT is the name of the CLAAS hydropneumatic suspension system. Depending on the mower model, this is either included as standard or optionally available, instead of spring suspension. It transfers the weight of the mower to the tractor, and therefore away from the grass cover. Another benefit is that it reduces lateral forces on sloping terrain, enhancing driver comfort and work performance.

Maximum suspension, minimum loading.

ACTIVE FLOAT provides the capability needed to adapt quickly and easily to all sorts of different conditions, such as wet spots or dry hillocks, and non-uniform crop material. The mower ground pressure can be flexibly adjusted with a single-acting spool valve even while the machine is working. Full suspension pressure is particularly desirable at the edge of the crop, so that the mower literally floats over the ground. The current setting can easily be read from a pressure gauge, which is clearly visible from the cab.

Top-quality results with ACTIVE FLOAT.



- Optimum ground-contour following and protection of the grass cover
- Clean forage
- Reduced power and fuel requirements
- Low wear
- High working speeds

With ACTIVE FLOAT, the mower glides smoothly and lightly over the ground



Fuel savings through speed reduction.


All DISCO mowers can be operated at a reduced PTO speed of 850 rpm when the conditions allow. This “integrated economy PTO” significantly reduces fuel consumption.

Maximum efficiency with ACTIVE FLOAT and economy PTO.

The ACTIVE FLOAT suspension system reduces the crude ash content by up to 17%. Additionally, fuel consumption falls by 2.5%, and reducing the PTO speed to 850 rpm can boost fuel savings by a further 20%.

Proven by results.

Following an independent field test, the trade magazine “profi” reported as follows in its 11/2015 issue: “We measured diesel savings per hectare of between 0.4 and 1 litre.”

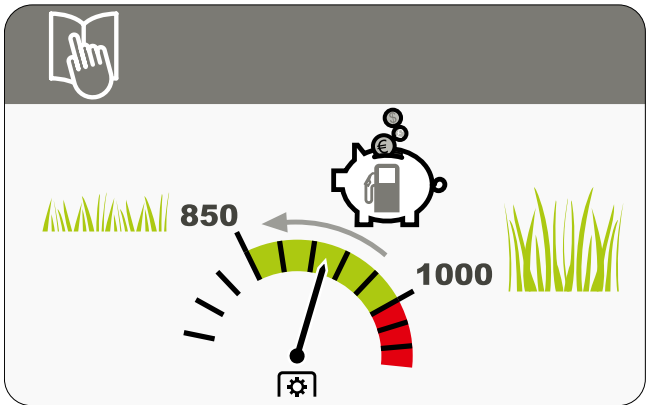

Do you just want to mow? Or do you want the DISCO experience?

We give you added value.

From us, you get more than a simple mower – we have given very careful thought to what you need and how we can make your life easier. DISCO machines are tried and tested in the field and each individual component is superbly engineered. But we're not content to rest on our laurels. We continuously strive to offer you the best mowing equipment you can get.

More stability.

A design you can rely on – always. That's all anyone wants, and that's exactly what you get from us!

The central mounting is the backbone of your large-scale mower. So we have made sure that it is extremely robust – as you can tell from its dimensions. The load-bearing arms support the centrally suspended pivoting mower units, while built-in dampers ensure stability at the headland.

This exceptional stability is underpinned by the quality of workmanship – something which we take very seriously right from the start! That's why all our welded joints are smoothly finished.



DISCO – because it has to run smoothly from the start. Machines that just keep going.

As the assembly supervisor on the DISCO line, Christian Schmidt checks the quality from the very start: “We lay the foundations for a long machine life. The central mounting, arms and mower bed are of the highest quality and built to last. Every machine is rigorously tested from top to bottom before leaving our assembly line.”

How do you benefit?

You get the most reliable, longest-lasting mower on the market.



A more successful harvest.

DISCO mowers help you harvest premium quality forage by providing precise cutting technology and a clean mowing performance. What's more, the ACTIVE FLOAT suspension system and speed reduction can save valuable fuel. This means

that you get more milk or energy for less fuel consumption and ultimately, more money in your balance sheet.



More quality.

We use only the highest quality components in every single part of the DISCO machines. The MAX CUT mower bed is designed primarily with forage quality in mind. We also believe that you should get lasting satisfaction from your mower and so we take special care to minimise wear. The visual appearance is also important. For instance, stainless steel bolts on the protective cover reflect the build quality on the inside of your DISCO mower.

More agility.

Do you want a mower that is powerful and long-lasting – but agile enough to use with smaller tractors? We can provide that. The arms on DISCO mowers are designed to be slightly angled to the rear. This construction transfers the weight closer to the tractor and has a positive effect on stability – in the field and on the road.

DISCO large-scale mowers.

Superb mowing performance.

Pure power.

No matter which DISCO large-scale mower you choose – you can be sure you made the right choice.

Because they all have one thing in common: with the MAX CUT mower bed, they deliver optimum cutting results.

You know best what you need from your mower, and we have the right machine: with or without conditioner, swath grouping and reverse drive.

With a wide choice of operating systems, you have complete control of your DISCO at all times – by whatever means you prefer.

Reverse mode:	
DISCO 9400 C DUO	9.10 m
Swath grouping:	
DISCO 9200 C AUTOSWATHER	9.10 / 8.90 m
With conditioner:	
DISCO 1100 C / RC BUSINESS	9.40–10.70 m
DISCO 9200 C BUSINESS DISCO	9.10 / 8.90 m
9200 C / RC CONTOUR	9.10 / 8.90 m
DISCO 8500 C / RC CONTOUR	8.30 / 8.10 m
Without conditioner:	
DISCO 1100 TREND	
DISCO 1010 TREND / COMFORT	9.40–10.70 m
DISCO 9300 TREND	9.90 / 9.70 m
DISCO 8500 TREND	9.10 / 8.90 m
	8.30 / 8.10 m

New features



Looking for a capable partner?
We have the solution.



	DISCO DUO 9400 C9.10 m	DISCO AUTOSWATHER 9200 C9.10 / 8.90 m	DISCO BUSINESS 1100 C / RC9.40–10.70 m 9200 C9.10 / 8.90 m		DISCO COMFORT 10109.90 / 9.70 m	DISCO CONTOUR 9200 C / RC9.10 / 8.90 m 8500 C / RC8.30 / 8.10 m	DISCO TREND 11009.40–10.70 m 10109.90 / 9.70 m 93009.10 / 8.90 m 85008.30 / 8.10 m
Common features	– MAX CUT mower bed – Speed reduction – ACTIVE FLOAT hydropneumatic suspension					– MAX CUT mower bed – Speed reduction – ACTIVE FLOAT hydropneumatic suspension	
Type-specific features	– Reverse-drive system – Tine conditioner	– Swathing grouping with belt units that can be pivoted in or out – Tine conditioner	– 1100 BUSINESS with telescopic arms – Without conditioner or with tine or roller conditioner, depending on the model		– Without conditioner – Vector folding for transport	– With tine or roller conditioner, depending on the model	– 1100 TREND with telescopic arms – 1010 TREND with vector folding – Without conditioner
Operation	– ISOBUS compatibility	– ISOBUS compatibility	– ISOBUS compatibility		– ISOBUS compatibility (lifting via spool valves)	– ISOBUS compatibility (with preselection control)	– Direct control via the tractor spool valve or control lever, no terminal required – Control box with preselection operation in the DISCO 1100 TREND
Hydraulics	– Load sensing	– Load sensing	– Load sensing		– Load sensing and hydraulic spool valves	– Hydraulic spool valves	– Hydraulic spool valves
Collision protection	– Hydraulic non-stop	– Hydraulic non-stop	– Hydraulic non-stop		– Hydraulic non-stop	– Mechanical	– Mechanical or hydraulic non-stop in 110 TREND
Front mower options	– All front mower options included	– Disc speed monitoring – ACTIVE FLOAT display and control – Automatic hydraulic folding of the protective cover – Lift control for MOVE front mower	– Disc speed monitoring – ACTIVE FLOAT display and control – Automatic hydraulic folding of the protective cover – Lift control for MOVE front mower		– Disc speed monitoring – ACTIVE FLOAT display	– Disc speed monitoring – ACTIVE FLOAT display	



CEMIS 700.
Ergonomic, ISOBUS-compatible terminal with touchscreen, hard key or rotary push switch control.



ISOBUS in the CEBIS.
Machine operation straight from an ISO-BUS-compatible tractor terminal.




CMOTION control lever.
Operation via programmable ISOBUS function keys.



PLUS operation.
Machine operation via CEMIS 10. For more comfort with TREND machines.

ISOBUS operation. Maximising opportunities.

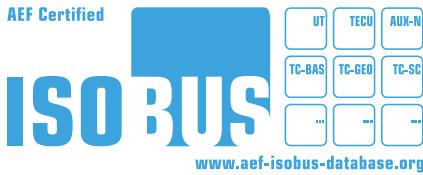

CEMIS 700.

With the CLAAS CEMIS 700 terminal you can control your implements independently of the tractor with load-sensing comfort hydraulics and ISOBUS. CEMIS 700 combines a touchscreen with hard keys and a rotary/push switch for intuitive implement control. These different control elements together with the ergonomic design make for user-friendly operation and straightforward menu navigation. The terminal also features a colour display which can show images from up to two cameras.

A brief digression:



UT stands for Universal Terminal. This makes it possible to operate a single implement via any terminal or a wide variety of implements via a single terminal – provided that both sides are UT-compatible.



AUX is the abbreviation for Auxiliary Control. This means that implement functions can be transferred to the function buttons or a tractor joystick and so controlled directly from them. There are two different auxiliary control standards; AUX-O and AUX-N.



	CEMIS 700	CEBIS with ISO UT
Screen size	7 inch	12 inch
ISOBUS operation (ISO UT)	UT 1 / UT 2	UT 1 / UT 2
Operation	keys / rotary-push switch / AUX-O / AUX-N	rotary-push switch / AUX-O / AUX-N
Touch	standard	standard
Camera interfaces	standard (2)	standard (2)

Flexible control.

The DISCO DUO, AUTOSWATHER BUSINESS and COMFORT models are equipped with load-sensing hydraulics as standard. They are centrally operated via the CEMIS 700 or a tractor with ISOBUS-compatible terminal, such as the latest AXION and ARION series incorporating CEBIS with ISO UT. The mower can also be controlled by other widely available ISOBUS terminals.



Single-handed control of the mower.

With the AUX control you can transfer all the main mower functions individually to your tractor's control lever. So control of your implement is, quite literally, in hand.



Full power ahead.
Because you can.

In clear view.

The DISCO DUO units travel in a pack of three. Mount them to a tractor with a reverse-drive system, and you get a clear view to the front of all three mower units. For those who are used to self-propelled machines, this is the ultimate mowing experience.

DISCO 9400 C DUO

9.10 m



DISCO DUO.

Like self-propelled mowing.



Individual mower unit lift at the headland



Unobstructed visibility reduces operator stress and boosts mowing productivity



Hydraulic non-stop collision protection – in the event of a collision, the mower pivots up and over the obstacle, and resets itself automatically



The standard lift and suspension rams of the ACTIVE FLOAT suspension system provide reliable sward protection



Compact transport position



Comfortable operation, for example via a range of ISO-BUS terminals and the ISOBUS function keys on the control lever

Unbeatable all-round view.

DISCO 9400 C DUO has a working width of 9.10 metres, making it the widest mower on the market for tractors with a reverse-drive system. The mounting location immediately in front of the cab gives the driver a clear view of the mower units and the crop, for maximum driving comfort. If required, the mower can be converted for operation as a front-rear combination.

Disc speed monitoring and drive protection.

If the disc speed of a mower unit falls below a defined limit (which can be pre-set as required), the driver is alerted by a visual and acoustic alarm signal. This means the full performance capacity of the machine can be harnessed at all times. An angle sensor can be used to save the required headland lift height. In combination with the disc speed monitoring system, the angle sensor effectively protects the drive from operator errors.

DUO benefits.

- ACTIVE FLOAT for all units (including front mower)
- MAX CUT for superb cutting quality
- Tine conditioner
- Hydraulic non-stop collision protection
- Kennfixx hydraulic connector with hydraulic function marking and magnetic bracket
- Hydraulically folding side protective covers (standard)
- Hydraulic transport lock
- Lower link guides for ease of mounting
- LED lights
- Four optional LED work lights for professional harvesting into the night

Three in one swath. Or not.

The ultra-flexible AUTOSWATHER.

Three in one swath. Or not. With this DISCO model, you can tailor your mowing to your conditions and requirements. Independent control of the belts means that you can spread the crop wide, throw the crop into the middle on one side only or combine the full width into a single swath.

DISCO 9200 C AUTOSWATHER 9.10 / 8.90 m



The biomass mower. Uncompromising.

A genuine all-rounder.

The DISCO 9200 C AUTOSWATHER is the professional mower for contractors, large agricultural businesses and bio-gas plant operators. The biomass mower with swath-grouping function was specifically developed for harvesting whole-plant silage crops such as forage rye or triticale. Multiple swath-laying options for optimum flexibility.

Play it safe.

The mower has a sealed conditioner tray to prevent any losses in the conditioner tines as the crop is transferred to the belt units. A belt cover is optionally available which enables you to further reduce material losses in particularly dense crops, for example. It also reduces cleaning times.

One mowing combination, four processes.



1 Swath grouping:

For swath grouping, the two belt units are folded down. The DISCO 9200 C AUTOSWATHER forms a perfect box-shaped swath specifically for a biomass or grass crop. The high torque of the belt drive allows operation at low rpm.



2 An 18-to-12 mowing strategy:

In addition to depositing a single swath, by folding up one of the belt units, you can consolidate a working width of 18 metres into 12 metres during a back-and-forth pass. Working in combination with the LINER 4700 TREND, which has a raking width of 12.70 metres, the mower can combine a working width of 18 metres into a single swath. Results from the field show that this can boost the JAGUAR's harvesting capacity by up to 40 percent.



3 Spreading the crop:

When the weather lets you down, stay flexible: by folding up the belt units, you can operate the DISCO 9200 C AUTOSWATHER as a normal large-scale mower.



4 Edge mowing:

The DISCO 9200 C AUTOSWATHER makes for even more efficient edge mowing: with an active belt unit at the outside field edge, you can throw the crop material inwards to make sure none of your valuable crop is lost.



A satisfied customer.

Farmer Markus Jehle operates a 500 kWh biogas plant in southern Germany. "The higher up-front investment is quickly paid off due to the greater efficiency", he says. "What's more, in the harvesting chain the JAGUAR always works at its best with the '18 m to 12 m' strategy. And the DISCO 9200 C AUTOSWATHER also makes for a smooth green rye harvesting operation, because it can handle a large amount of material cleanly and with minimal waste."

A successful energy harvest.



Disc speed monitoring and drive protection.

If the disc speed of a mower unit falls below a defined limit (which can be pre-set as required), the driver is alerted by a visual and acoustic alarm signal. This means the full performance capacity of the machine can be harnessed at all times. An angle sensor can be used to save the required headland lift height. In combination with the disc speed monitoring system, the angle sensor effectively protects the drive from operator errors.

Front mower options.

For even greater convenience, users of DISCO 9200 C AUTOSWATHER machines can also optimise their CLAAS front mower, provided the front mower and large-scale mower are fitted with the required options. No additional spool valve is then required for additional front mower options. The options include disc speed monitoring and the ACTIVE FLOAT display, ACTIVE FLOAT control, and automatic control of the hydraulically foldable protective covers.

AUTOSWATHER benefits.

- Two individual belt units with belt speeds that can be pre-set for maximum crop throughput
- ACTIVE FLOAT
- Tine conditioner
- MAX CUT for superb cutting quality
- Slope control (optional)
- Hydraulic non-stop collision protection – the mower unit pivots up and over the obstacle, and resets itself automatically.
- Kennfixx hydraulic connector with hydraulic function marking and magnetic bracket
- Hydraulically folding protective side covers (optional)
- Hydraulic transport lock
- Lower link guides for ease of mounting
- LED lights
- Six optional LED work lights for professional harvesting into the night
- Automatic central lubrication (optional)



BELT BOOST.


When the mower units are raised at the headlands, the feed belts are automatically accelerated to the maximum speed with the patented BELT BOOST technology. This forms a tapered swath, rather than increasing its width. The swath is then picked up by the harvesting machine following behind without any loss of material.



Professional control system provides individual lift and folding capability




Operation is simplicity itself with the ergonomic CEMIS 700 terminal

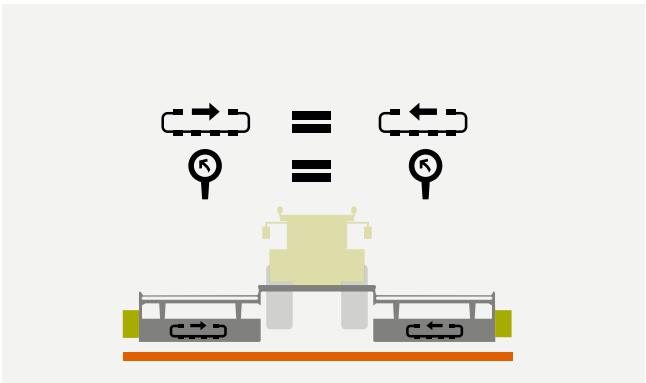

Optional slope control.

A tilt sensor in the headstock enables the ground pressure (ACTIVE FLOAT) and belt speed to adjust automatically to the current slope angle. The pressure change required to suit the gradient can easily be adjusted from the terminal. This reduces the driver's workload, and improves quality. The change in frictional forces also helps to positively counter slope drift, which in turn protects the sward. The result is opti-

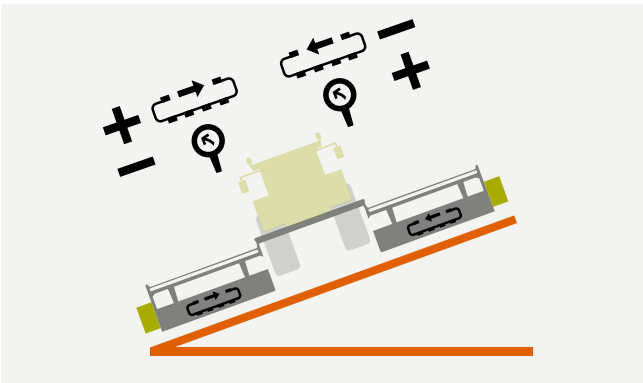

mal swath formation in cross-slope passes, and less risk of unmown strips or crop soiling.

Put your time to good use. For perfect forage.

Large-scale mowers with conditioner

Time-saving efficiency.

What if you don't just want to prepare optimum forage with your DISCO mower, but condition it as well? No problem – DISCO mowers not only offer outstanding productivity, they can also save you valuable time. Opt for mowers with a conditioner and you are ideally equipped to make best use of the short harvest window.

DISCO 1100 C / RC BUSINESS	9.40–10.70 m
DISCO 9200 C BUSINESS	9.10 / 8.90 m
DISCO 9200 C / RC CONTOUR	9.10 / 8.90 m
DISCO 8500 C / RC CONTOUR	8.30 / 8.10 m



Mowing like a champion.

Unprecedented productivity.

With a working width of up to 10.70 m, the DISCO 1100 C / RC BUSINESS is the largest conditioner mower on the market. It features unsurpassed performance, smart technology and comfortable operation, making it the perfect machine for professional operations. The DISCO 1100 BUSINESS is available with either a tine or a roller conditioner. The DISCO 9200 C BUSINESS has a maximum working width of 9.10 m and is equipped with tine conditioners.



The DISCO 1100 C / RC BUSINESS drive concept.

The intelligent drive train design is ultra-reliable, and requires very little maintenance. The external mower drive means that a simple telescopic drive shaft is all that is needed.

The DISCO 1100 telescopic arms.


The two telescopic arms, each with a 3.80 m wide MAX CUT mower bed, can be infinitely adjusted to the front mower from the terminal. The protected inside travel measurement rams provide flexible overlap setting capability, allowing a greater overlap in tight curves or on slopes, for example.

For road transport the telescopic arms can be folded up and retracted to give up to 20 cm ground clearance. This combines a maximum working width of 10.70 m, including conditioner, with a compact road transport position of less than 4.0 m in height.



Optional slope control.

A tilt sensor mounted on the headstock provides optimal assistance for mowing on slopes. Automatic control of the telescopic travels enables not just the ground pressure (ACTIVE FLOAT) but also the position of the rear mower units to be adapted to the gradient. This helps to prevent drift and avoids unmown strips on sloping ground – ensuring a clean cut whatever the terrain.

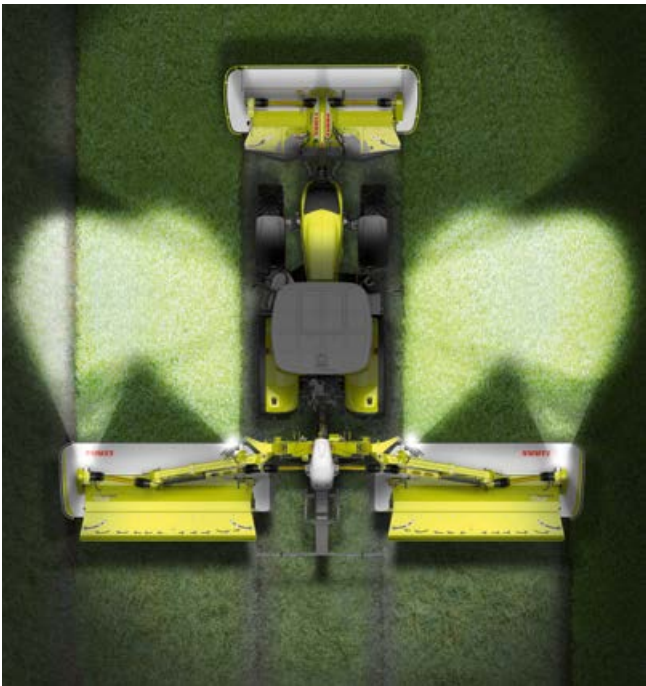

Powerful illumination.

Harvesting sometimes continues into the night, so four optional LED work lights provide for professional-quality mowing after dusk.



Disc speed monitoring and drive protection.

If the disc speed of a mower unit falls below a defined limit (which can be pre-set as required), the driver is alerted by a visual and acoustic alarm signal. This means the full performance capacity of the machine can be harnessed at all times. An angle sensor can be used to save the required headland lift height. In combination with the disc speed monitoring system, the angle sensor effectively protects the drive from operator errors.

Front mower options.

- Users of DISCO 9200 BUSINESS and DISCO 1100 BUSINESS machines can also optimise their CLAAS front mower, provided the front mower and large-scale mower are fitted with the required options. This means no additional spool valve is required. The options include disc speed monitoring and the ACTIVE FLOAT display, ACTIVE FLOAT control and automatic control of the hydraulically folding protective covers.

BUSINESS benefits.

- ACTIVE FLOAT
- MAX CUT for superb cutting quality
- Hydraulic non-stop collision protection
- Kennfixx hydraulic connector with hydraulic function marking and magnetic bracket
- Hydraulically folding side protective covers as standard, additional two-part folding of inner protective covers in the DISCO 1100
- Hydraulic transport lock
- Lower link guides for ease of mounting
- LED lights
- Four optional LED work lights for professional harvesting into the night

Unbeatable work rates.

Markus Hagmann, a biogas plant operator in southern Germany, mows between 600 and 700 hectares per year with his DISCO 1100 RC BUSINESS. The machine often runs for more than 10 hours at a time, so it's essential that the technology works reliably.

He uses an intensive five-way crop rotation strategy, with plenty of clover and not too much maize. For optimum drying performance, Markus has opted for a roller conditioner. "But the system is also consistently reliable for higher-density crops such as field crops", he says.



Depending on the front mower, working widths of between 9.40 and 10.70 m can be achieved using the hydraulically controlled arms



The telescopic arm technology offers significant benefits for the farming professional



Optimum results even in curves, thanks to maximum overlap (up to 60 cm)



Hydraulic non-stop collision protection – in the event of a collision, the mower pivots up and over the obstacle, and resets itself automatically



Additional options for the front mower, e.g. disc speed monitoring, ACTIVE FLOAT control and protective cover folding



Less than 4.0 m: compact transport position with generous ground clearance in both BUSINESS models

Ready for any conditions.
Always.



Top performer over many years.

With its two working widths (9.10 / 8.90 m or 8.30 / 8.10 m), the DISCO CONTOUR is a tidy and reliable performer in all conditions.

Proven CONTOUR benefits.

- ISOBUS control with standard ACTIVE FLOAT
- Mechanical collision protection
- Choice of tine or roller conditioner
- Synchronised mower unit lifting and lowering even on slopes
- Compact and robust

Even greater comfort.

- MAX CUT for superb cutting quality
- Kennfixx hydraulic connector with hydraulic function marking
- Programmable headland height
- Hydraulic protective cover folding in all DISCO 9200 CONTOUR machines
- Hydraulic transport lock (without cable)
- Lower link guides for ease of mounting

Front mower options.

For even greater comfort, the DISCO CONTOUR provides disc speed monitoring and ACTIVE FLOAT display for your CLAAS front mower, provided the ACTIVE FLOAT option is fitted on the front mower.



Disc speed monitoring and drive protection.

If the disc speed of a mower unit falls below a defined limit (which can be pre-set as required), the driver is alerted by a visual and acoustic alarm signal. This means the full performance capacity of the machine can be harnessed at all times. An angle sensor can be used to save the required headland lift height. In combination with the disc speed monitoring system, the angle sensor effectively protects the drive from operator errors.



Endurance test in alfalfa.

The French dried crop product specialist Luzéal operates over a total area of 40,000 hectares at six different locations, producing around 162,000 tonnes of dry product a year in the form of pellets and bales. At their Saint-Remy-sur-Bussy site, they used the DISCO 9100 RC predecessor model in combination with a DISCO 3500 FRC front mower and the MAX CUT mower bed. Over two years of harvesting, they mowed and conditioned around 20,000 hectares of alfalfa with this mowing combination. With the exception of a single SAFETY LINK module, which was shorn off during a collision, there were no workshop downtimes. According to site manager Hughes Dubreuil: "We're very impressed by the quality of work and reliability of the mower combination and MAX CUT mower bed."



Compact transport position for safe road travel



Space-saving: stable parked position for all large-scale mowers



If the tractor is equipped with an ISOBUS-compatible terminal, preselected functions for the CONTOUR can be operated from there

DISCO mowers without conditioner. The simple joy of mowing.

Reliable and highly manoeuvrable.

DISCO mowers without conditioner are available in different versions with various working widths. These robust machines combine strength and power with ease of operation. So why not take a closer look.

- DISCO mowers are guaranteed to please – equipped with:
- The unique MAX CUT mower bed which is designed not only to produce the perfect cut and the cleanest forage, but to give lasting satisfaction thanks to the highest quality components.
 - The ACTIVE FLOAT suspension system, which enables you to respond quickly to changing conditions by increasing or decreasing the pressure as your mower glides over the ground.
 - So when conditions allow, you can simply mow at a reduced PTO speed of 850 rpm and save an extra litre of fuel.
 - Perfect attention is the common thread running through your DISCO mower. Red colour-coding helps you select the right setting, insert the correct mower blade and much more.

DISCO 1100 TREND	9.40–10.70 m
DISCO 1010 TREND / COMFORT	9.90 / 9.70 m
DISCO 9300 TREND	9.10 / 8.90 m
DISCO 8500 TREND	8.30 / 8.10 m

New features



When more productivity is needed.



The DISCO 1100 TREND also has a practical control unit for the individual lift function, for folding into the transport position, and, as an option, for switching the work lights on and off

Simply wide.

This mower is ideal for large-scale farming operations that rely on their own fleet of high-performance tractors. An electric control terminal allows the preselection of specific functions, such as individual mower unit lift. The mower can then be operated from the comfort of the cab, with no need for a con-

trol cable. And all other aspects are controlled by the operator via the spool valves and the tractor's headland management system.



Two hydraulically controllable telescopic arms with continuous adjustment for optimal overlapping in the DISCO 1100 TREND



Compact, robust headstock with integrated ACTIVE FLOAT suspension system as standard

DISCO 1100 TREND. Working widths of 9.60–10.70 m.

- MAX CUT mower bed – best chop and forage quality
- ACTIVE FLOAT – adjusts the ground pressure while on the move
- 850 rpm – saves fuel in less-dense crops
- Operation via electric control box with preselection
- Telescopic arms – infinitely variable adjustment of working width for optimal overlap
- Hydraulic non-stop collision protection – deflects up and back without you having to stop
- Red guides – make mowing easier



Pressure-gauge dial to conveniently set the ground pressure for both mowing units



Lower link guides for ease of mounting

Big in the field.
Small on the road.



Pure power.

The DISCO 1010 TREND and COMFORT models offer you a large working width of 9.70 and 9.90 m – depending on the desired overlap. And with CLAAS you get two more mowing discs, making nine in total – for a genuine 3.80 m working width per mower unit!

Ideal on the road – compact and close to the tractor without endangering oncoming traffic during turning manoeuvres. Even steep field entrances can be negotiated with ease. The tilt angle of the mower units also makes for easy hitching and unhitching. Vector folding is provided by an additional valve in the ram of the hydraulic collision protection. What's more, the mower units easily pivot inwards to give you a clear view in the rear mirror.



DISCO 1010. Because the mowing journey starts on the way to the field.

DISCO project manager Cornelia Paul knows what counts: “We designed this unique folding concept with a specific aim in mind. Vector folding makes it possible to transport even the largest working widths safely and in the middle at the centre of gravity.”

How do you benefit?

The tractor-mower combination is exceptionally manoeuvrable and the mower barely swings out at all – allowing you to negotiate tight or steep field entrances with ease.



DISCO 1010 TREND / COMFORT. 9.90 / 9.70 m working width.

- MAX CUT mower bed – best chop and forage quality
- ACTIVE FLOAT – adjusts the ground pressure while on the move
- 850 rpm – saves fuel in less-dense crops
- Operating options – without electronics / with individual lift / PLUS operation / COMFORT operation
- Hydraulic non-stop collision protection – deflects up and back without you having to stop
- Red guides – make mowing easier
- Vector folding for compact road travel despite large working width

Simply wide. Ready for peak performance.

MAX CUT mower bed. The hallmark of every DISCO.

With the MAX CUT mower bed, you can simply get on with mowing – safe in the knowledge that superb chop quality is a given. The bed is designed to maximise overlap while the specially shaped underside deflects dirt particles – all to optimise your forage quality and performance.

Ground pressure can be adjusted to suit your needs.

We have fitted our ACTIVE FLOAT suspension system as standard to enable you to respond flexibly to changing conditions. So now you can vary the ground pressure of your mower from the comfort of your cab, increasing or decreasing it as required. To save fuel, reduce wear and improve forage quality.



Even maintenance is less of a chore.

All the blades are safely stored in the convenient knife box so you always have the right one to hand. The red paint on the anticlockwise blades and mowing discs save time, simplify blade changes and guarantee the perfect cut. And you don't have to spend long on lubrication either: different coloured stickers indicate when and where to lubricate.



TREND operation.

These DISCO models are the perfect choice if you simply want to mow – using professional equipment, but without electronics: folding, mowing, lifting – all via one single-acting spool valve. To control the ACTIVE FLOAT while underway, you simply need another single-acting spool valve. Pivoting backwards and forwards is controlled via a double-acting spool valve.

Optional: direct individual lift function.

With an additional single-acting spool valve, you can lift each mowing unit individually via a separate spool valve. You can use the headland management system to lift both mowing units together to make the most of the tractor's intelligence.

COMFORT operation.

A COMFORT version of the DISCO 1010 is also available, which combines the simple basic functions with ISOBUS operation.

Folding and unfolding is controlled by one spool valve, so the lift can be integrated into the headland management. The load-sensing hydraulics automatically control protective cover folding, pivoting to the rear and the transport lock. Further functions can be conveniently controlled via ISOBUS or the function keys, e.g. rapid adjustment of the ACTIVE FLOAT pressure on both sides.

The combined spool valve and ISOBUS operation in the DISCO COMFORT is particularly useful for customers operating under constantly changing conditions.

PLUS operation. The alternative for those wanting even more functionality.

This option includes a hydraulic transport lock, hydraulic protective cover folding and an automatic function for individual lifting. The latter preselects the second mowing unit as soon as the first is raised for optimum ease of operation.

For this you need a double-acting spool valve instead of the single-acting one – the function is operated via the CEMIS 10 terminal. PLUS operation is particularly recommended for tractors with few or mechanical spool valves.



Professional mowers for optimal mowing performance.



Simply the ultimate in efficiency.

That's the USP of the DISCO 9300 TREND, with a working width of 9.10 or 8.90 m. Thinking of stepping up to a large-scale mower? Then the entry-level DISCO 8500 TREND is the perfect choice. With a working width of 8.30 or 8.10 m, it combines agility with an impressive work rate. And needless to say, the core component of these mowers is the proven MAX CUT mower bed. Features such as the convenient knife box, the red marking on the anticlockwise blades and mowing discs, and the colour coding of different lubrication intervals even make maintenance less of a chore.

Ground-contour following, height adjustment and lifting height.

Both mower units are suspended at the centre of gravity, so they can pivot freely and adapt to the ground contours. A quick glance at the arrow markings on the arm indicates the correct adjustment height, and then you're off. Built-in dampers maintain the position of the mower unit at the headland to guarantee maximum ground clearance and smooth mower movements.

Safe, solid, durable.

The mechanical collision protection is inclined at an angle of 15° so that in the event of a collision, the mower swings back and over the obstacle. Mowing can then continue after briefly reversing to reset the mower. As core load-bearing elements, the central mounting and the arms are particularly robust and solidly constructed – built to last.



TREND operation.

These DISCO models are the perfect choice if you simply want to mow – using professional equipment, but without electronics: folding, mowing, lifting – all via one single-acting spool valve. To control the ACTIVE FLOAT while underway, you simply need another single-acting spool valve.

Optional: PLUS operation – the alternative for those wanting even more functionality.

This option includes a hydraulic transport lock, hydraulic protective cover folding (DISCO 9300) and an automatic function for individual lifting (2). The latter preselects the second mowing unit as soon as the first is raised for optimum ease of operation. For this you need a double-acting spool valve instead of the single-acting one – the function is operated via the CEMIS 10 terminal(1). PLUS operation is particularly recommended for tractors with few or mechanical spool valves.

Optional: direct individual lift function (2).

With an additional single-acting spool valve, you can lift each mowing unit individually via a separate spool valve. You can use the tractor's headland management system to lift both mowing units together.



DISCO 9300 and 8500 features – 9.10 / 8.90 and 8.30 / 8.10 m working width.

- MAX CUT mower bed – best chop and forage quality
- ACTIVE FLOAT – adjusts the ground pressure while on the move
- 850 rpm – saves fuel in less-dense crops
- Operating options – without electronics / with individual lift / PLUS operation
- Mechanical collision protection – deflects up and back
- Red guides – make mowing easier

DISCO. Because we can only design what we understand. Machines developed by farmers for farmers.

Matthias Berger has been involved in the development of DISCO mowers for over 17 years: "As a test engineer and contract farmer, I use the machines every day. So I understand the importance of intuitive control – especially on long harvesting days."

How do you benefit?

With the intelligent individual lift function, you can mow any field that tapers to a point without repositioning your hands.



DISCO front mowers.

Always at the forefront.

Front runner for peak performance.

A large-scale mower is generally a team player – so we have the right front mower for any combination

DISCO models all have one thing in common: with the MAX CUT mower bed, they deliver optimum cutting results. The DISCO 3150 F has a compact, lightweight construction – ideal for smaller tractors and working on slopes. The DISCO PROFIL series features a trailed mower bed with a low pivot point – allowing it to adapt to small bumps faster than any other mower on the market. The special feature of the DISCO MOVE is its headstock – the mower is pulled by the tractor, but all movements and guidance are controlled by the mower itself. This makes it exceptionally flexible and creates a completely unique vertical movement of 1 m.

DISCO MOVE 3600 F / FC / FRC	3.40 m
DISCO MOVE 3200 F / FC / FRC	3.00 m
DISCO PROFIL 3600 F / FC / FRC	3.40 m
DISCO PROFIL 3200 F / FC / FRC	3.00 m
DISCO 3150 F	3.00 m



Ahead of the pack.
The front mower family.



	DISCO MOVE	DISCO PROFIL	DISCO 3150 F
Models and working widths	3600 FRC / FC / F: 3.40 m 3200 FRC / FC / F: 3.00 m	3600 FRC / FC / F: 3.40 m 3200 FRC / FC / F: 3.00 m	3150 F: 3.00 m
Mower bed	MAX CUT	MAX CUT	MAX CUT
Attachment	Quick hitch A-frame and direct attachment	Quick hitch A-frame	Quick hitch A-frame
Pressure release	ACTIVE FLOAT integrated in the 3-point headstock	Spring suspension; optional ACTIVE FLOAT	Spring suspension; optional ACTIVE FLOAT
Type	Compact and straightforward	Slender and straightforward	Short and close to the tractor
Pivot point	Pivot points for transverse and longitudinal oscillation; integrated linkage geometry for vertical movement independently of the tractor front linkage	Pivot points for transverse and longitudinal oscillation (vertical via tractor lower linkage)	Pivot point for transverse oscillation (vertical via tractor lower linkage)

F = front
C = tine conditioner
RC = roller conditioner

DISCO MOVE.

Making all the right moves.



Optimal ground-contour following – independently of the tractor linkage.
The DISCO MOVE moves both horizontally and vertically, independently of the tractor front linkage, and fully accommodates the mower lift height. The low position of the mower bed pivot point handles small bumps, while the MOVE linkage geometry takes care of larger surface irregularities to ensure flawless adaptation to the terrain – with unique vertical movement of up to 1,000 mm. ACTIVE FLOAT hydropneumatic suspension, which can be adjusted while on the move, is integrated with the headstock as standard equipment.



Multifunctional headstock.
The unique headstock makes mower attachment quick and easy. Mounting is either via the tractor linkage or the quick hitch A-frame. No additional supports are required for hitching and unhitching. Kennfixx couplings are standard and depending on their tractor equipment, customers can choose on which side they wish to mount the hydraulic hoses and pressure gauge.



ACTIVE FLOAT as standard equipment.
The unique configuration with separate hydraulic circuits for lift and suspension enables the rams to be optimally adapted to their respective functions. The hydraulic system provides uniform suspension for the mower unit over the entire movement range. Settings can be adjusted at any time while the vehicle is under way, using the relevant hydraulic circuit. This enables the mower to respond smoothly and rapidly to changing conditions in the field.



Parallel control of front and rear mowers.
DISCO MOVE makes an outstanding partner for a DISCO large-scale mower. Depending on the equipment options installed, the front mower can be operated directly via the large-scale mower hydraulics. Additional features deliver superior work performance, and driver stress is further reduced through automated processes.



Everything in full view.
The optional double mirror mounted on the mower increases road safety at difficult intersections. The compact design of the headstock gives you a clear view to the front.

DISCO PROFIL.

For the fastest ground-contour following.



PROFIL. Three-dimensional ground-contour following.

PROFIL linkage geometry gives the mowers three-dimensional ground-contour-following capability, independent of the tractor movement. The mower is suspended on a pivot support and therefore adapts perfectly to contours transverse to the direction of travel. The pulled suspension of the mower bed combined with the low pivot point ensure optimum longitudinal adaptation. Low ground tracking prevents the mower digging into the soil, protects the grass sward and enables higher mowing speeds. It all adds up to a uniform mowing result.

Folding protective covers.

Folding protective covers reduce the road transport height to 3.00 or 3.40 metres. A hydraulic folding option is also available, which requires a double-acting spool valve.

Maintenance and cleaning.

The protective covers fold upwards all the way around, allowing easy access to the mower bed and all maintenance points – ideal for knife changes, for example. As in all DISCO mowers, the mower has an integrated knife box with replacement blades. The drive shafts have a lubrication interval of 250 hours, which further reduces maintenance time and costs.



The benefits.

- MAX CUT mower bed for maximum chop quality
- ACTIVE FLOAT optional hydropneumatic suspension
- Available without conditioner or with tine or roller conditioner
- Optional folding illuminated warning signs for safe transport



Freely pivoting suspension for accurate ground-contour following across the direction of travel



Thanks to the low pivot point, the DISCO PROFIL follows the ground contours, and not the tractor



Compact headstock at the front linkage gives the mower generous ground clearance at headlands

DISCO 3150 F.

Compact operator.



Agile front mower with professional-level technology.

The DISCO 3150 F is now also equipped with MAX CUT professional-level technology. The tunnel effect minimises crude ash content – a key requirement for top-quality forage. A swathing disc and half-drum are included as standard equipment, ensuring the crop is laid in a clean swath.

For the DISCO 3150 F, there is a choice of either adjustable spring suspension or ACTIVE FLOAT suspension.

Close to the tractor.

A compact headstock close to the tractor ensures optimum ground-contour following and a perfect cut.

With its unique design, the DISCO 3150 F is ideal for use with smaller and special tractors.

Impeccable performance.

Ulrich Hasler from Germany's Allgau region is delighted with his DISCO 3150 F: “The cut quality has been consistently very good, and the compact construction is ideal for the hilly terrain around here. The mower is light and doesn't drift down slopes, but instead follows the ground contours exactly.” Because the land is so variable, Ulrich Hasler mows some areas only once a year, but others up to five times a year. Accordingly, the technology must be able to handle a very wide range of conditions. “Not every front mower can handle high speeds when mowing low growth while travelling downhill, but the DISCO 3150 F can.”



Intelligent transverse oscillation.

The inclined pivot point ensures perfect ground-contour following to protect the grass cover and keep the crop material clean.



Sturdy structure.

The DISCO 3150 F offers characteristic CLAAS quality. All components have the same quality standards and material thickness specifications as the front mowers in the MOVE and PROFIL model series.

Deer protection – how can we help?



Every year in spring.

Early grassland harvesting in the months from April to June is a time when deer are particularly at risk: the natural instinct of fawns, for example, is to duck and take cover when they hear an unfamiliar noise or sense danger. As a result, they are easily overlooked during mowing, and can become caught up in the mower mechanism. Farmers and contractors have a num-

ber of options available for actively protecting deer, as well as protecting livestock from the risk of botulism, and avoiding emotional stress for the mower operator in the event of an accident.



A CLAAS community initiative.

In a partnership with farmers, researchers and hunters, CLAAS has researched a number of innovative and practical solutions for more precise detection of the presence of deer. Infrared cameras can be used to scan fields from the air, reliably detecting the animals even in tall grass by the heat they give off.


Acoustic and visual deterrents.

Commercially available solutions for scaring off deer, with acoustic signals or visual deterrents, for example, should ideally be placed in the field the night before the mowing operation.

Search teams.


A highly effective strategy, but also very expensive in terms of time and personnel, is searching through the fields beforehand with the game tenant.

Mowing strategies.

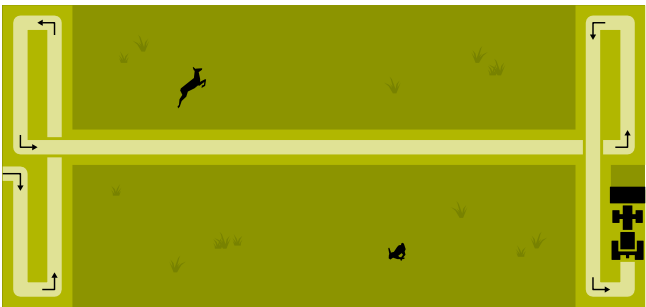


Advance mowing the evening before.

A small part of the field can be mown the night before. This changes the animals' environment, making the mother anxious and prompting her to take her young to a safe location.

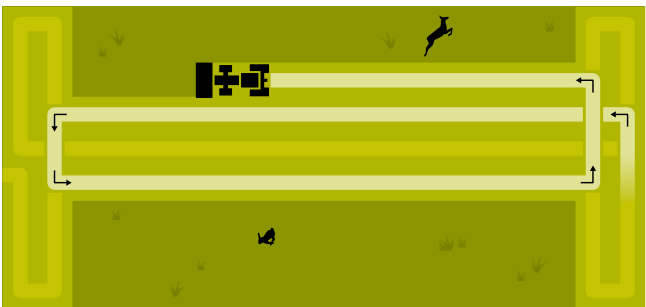


Starting with the headlands.

For long fields, the headlands can be mown first, then the longitudinal sides, working outwards. The deer can then run away out of the mowing area.

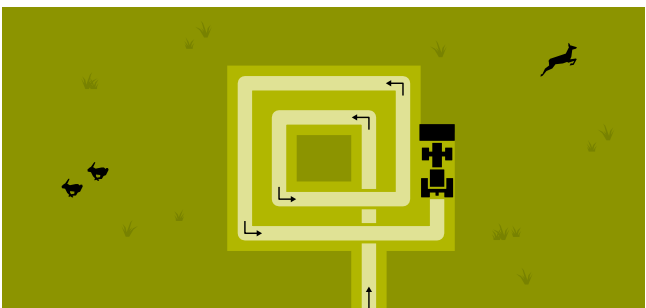

Working from inside to outside.

Mowing from the inside towards the outside gives the deer the chance to flee to ground outside the mowing area.

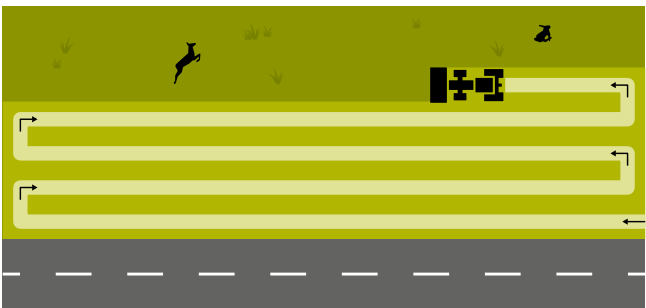

Starting from the roadside.

For fields beside the road, the longitudinal side beside the road should be mown first. Then keep mowing from the road inwards, so that the deer will not run out onto the road.

Whatever it takes –
CLAAS Service & Parts.





CLAAS Service & Parts
is always there for you, 24/7.
service.claas.com



Scan me.



Specially matched to your machine.
Precision-manufactured parts, high-quality consumables and useful accessories. Choose our comprehensive product range to be certain of receiving exactly the right solution to ensure 100% operating reliability for your machine.



For your business: CLAAS FARM PARTS.
CLAAS FARM PARTS offers one of the most comprehensive ranges of multi-brand parts and accessories for all agricultural applications on your farm.



Global supply.
The CLAAS Parts Logistics Center in Hamm, Germany, stocks almost 200,000 different parts and has a warehouse area of over 183,000 m². This central spare parts warehouse delivers all ORIGINAL parts quickly and reliably all over the world. This means that your local CLAAS partner can supply the right solution for your harvest or your business within a very short time.





Your local CLAAS distributor.
Wherever you are, you can count on us to always provide you with the service and the contact people you need. Your CLAAS partners are on hand in your local area, ready to support you and your machine around the clock. With know-how, experience, commitment and the best technical equipment. Whatever it takes.

Because a clean cut for you means a happy customer for us.

Colour-coded for perfect mowing results.

The ingenuity of the DISCO mower is reflected in the detail. We have included a host of practical aids to help you adjust your machine to perfection. And we've painted them red so they are easy to see. Even the fitting lever for the quick knife change is red so you can't lose sight of it if you put it down in the field.

From the 2022 season, all MAX CUT mower beds will be colour-coded so you can tell at first glance which mowing discs rotate anticlockwise. Not only do the corresponding mowing discs have red caps, the associated blades are also red. This clear colour-coding saves valuable time and prevents errors – all to ensure the perfect cut.

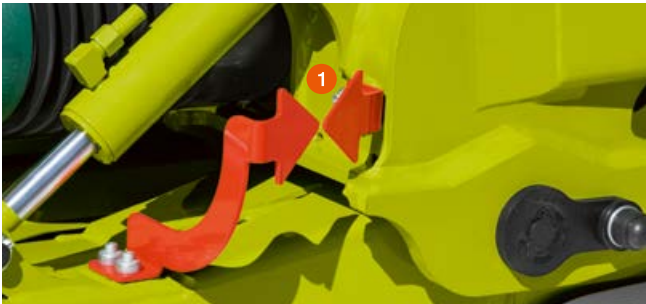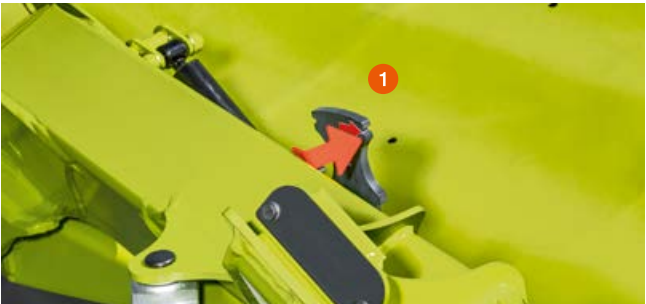

- 1 Working height adjustment
- 2 Fitting lever for quick knife change
- 3 ACTIVE FLOAT gauge
- 4 Conditioner intensity
- 5 MAX CUT mower bed, anticlockwise rotating mowing discs marked red

	DISCO ¹		3600 FRC MOVE	3600 FC MOVE	3600 F MOVE	3200 FRC MOVE	3200 FC MOVE	3200 F MOVE	3600 FRC PROFIL	3600 FC PROFIL	3600 F PROFIL	3200 FRC PROFIL	3200 FC PROFIL	3200 F PROFIL	3150 F
Front mowers															
Dimensions and weights															
Working width	m	3.40	3.40	3.40	3.00	3.00	3.00	3.00	3.40	3.40	3.40	3.00	3.00	3.00	3.00
Transport width	m	3.40	3.40	3.40	3.00	3.00	3.00	3.40	3.40	3.40	3.40	3.00	3.00	3.00	3.00
Machine height	m	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Weight (depending on conditioner)	approx. kg	1420	1390	1060	1250	1220	970	1150	1120	830	1000	970	740	685	
MAX CUT mower bed ²		●	●	●	●	●	●	●	●	●	●	●	●	●	
Discs (2 knives per disc)		8	8	8	7	7	7	8	8	8	7	7	7	7	
Quick blade change		●	●	●	●	●	●	●	●	●	●	●	●	●	
Conditioner speed	rpm	950	900 / 770	—	950	900 / 770	—	950	900 / 770	—	950	900 / 770	—	—	
Spring suspension		—	—	—	—	—	—	●	●	●	●	●	●	●	
ACTIVE FLOAT suspension		● ³	● ³	● ³	● ³	● ³	● ³	○ ³	○ ³	○ ³	○ ³	○ ³	○ ³	○ ³	
Tractor requirements															
Hitch category		II	II	II	II	II	II	II	II	II	II	II	II	II	
PTO shaft speed	rpm	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	
Hydraulic spool valves		1 sa (+1 da ⁴ + 1 sa ³)							(1 da ⁴ + 1 sa ³)						
Equipment															
Hydraulically foldable protective side covers		○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	○ ⁴	—
Wide crop spreading		—	○	—	—	○	—	—	○	—	—	○	—	—	
Adjustable swathing plates		●	●	—	●	●	—	●	●	—	●	●	—	—	
Outside swathing disc		—	—	● (2 ×)	—	—	● (1 ×)	—	—	● (2 ×)	—	—	● (1 ×)	● (1 ×)	
High-cut skids		○	○	○	○	○	○	○	○	○	○	○	○	○	
Twin high-cut skids		○	○	○	○	○	○	○	○	○	○	○	○	○	
Wear skids		○	○	○	○	○	○	○	○	○	○	○	○	○	
Bed protection device (for intensive use conditions)		○	○	○	○	○	—	○	○	○	○	○	—	—	
Illuminated warning signs		○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○ ⁵	○
Double mirror		○	○	○	○	○	○	○	○	○	○	○	○	○	
Hydraulic transport lock		—	—	—	—	—	—	—	—	—	—	—	—	—	
Mechanical collision protection		—	—	—	—	—	—	—	—	—	—	—	—	—	

¹ C = tine conditioner, RC = roller conditioner, F = front, T = trailed, no suffix = without conditioner
² Standard mowing height 40 mm (continuously adjustable, 30–70 mm)
³ 1 x sa required for setting the ACTIVE FLOAT pressure
⁴ 1 x da required for the hydraulic folding of the protective cover
⁵ Folding

DISCO large-scale mowers ¹		9400 C DUO	9200 C AUTOSWATHER	1100 RC BUSINESS	1100 C BUSINESS	9200 C BUSINESS	1010 COMFORT	9200 RC CONTOUR	9200 C CONTOUR	8500 RC CONTOUR	8500 C CONTOUR	1100 TREND	1010 TREND	9300 TREND	8500 TREND
Dimensions and weights															
Working width ²	m	9.10	9.10 / 8.90	9.40–10.70 ³	9.40–10.70 ³	9.10 / 8.90	9.90 / 9.70	9.10 / 8.90	9.10 / 8.90	8.30 / 8.10	8.30 / 8.10	9.60–10.70 ³	9.90 / 9.70	9.10 / 8.90	8.30 / 8.10
Transport width	m	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95	2.95
Machine height in transport position	m	3.81	3.89	3.79	3.79	3.89	3.85	3.89	3.89	3.64	3.64	3.79	3.85	3.89	3.64
Weight	approx. kg	2800	3590 (+ 40 ⁴)	3570	3520	2360	2220	2600	2320	2300	2100	2600	2220	1970	1790
MAX CUT mower bed ⁵		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Discs (2 knives per disc)		2 × 8	2 × 8	2 × 9	2 × 9	2 × 8	2 x 9	2 × 8	2 × 8	2 × 7	2 × 7	2 × 9	2 x 9	2 × 8	2 × 7
Quick blade change		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Conditioner speed	rpm	910	1100 / 990	940	910	910	–	940	910	940	910	–	–	–	–
ACTIVE FLOAT suspension		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Tractor requirements															
Hitch category		III	III	III	III	III	III	III	III	III	III	III	III	III (II)	III (II)
PTO shaft speed	rpm	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)	1000 (850)
Hydraulic spool valves		LS (or 1 × sa + free return) + 1 × sa for P2					LS + 1 x sa (+ 1 x sa ⁶)	1 × sa + 1 × da				2 × da (+ 1 × sa)	1 × da + 2 x sa (+ 1 x sa ⁶)	2 × sa (+ 1 × sa ⁶)	
Operation															
ISOBUS-compatible		●	●	●	●	●	●	●	●	●	●	–	–	–	–
CEMIS 700		○	○	○	○	○	○	○	○	○	○	–	–	–	–
ISOBUS cable		○	○	○	○	○	○	○	○	○	○	–	–	–	–
PLUS operation		–	–	–	–	–	–	–	–	–	–	–	○	○	○
Direct individual lift		–	–	–	–	–	○	–	–	–	–	–	○	○	○
Equipment															
Hydraulically foldable protective side covers		●	○	●	●	●	○	○	○	–	–	●	○	–	–
Wide crop spreading		○	●	–	○	○	–	–	○	–	○	–	–	–	–
Adjustable swathing plates		●	●	●	●	●	–	●	●	●	●	–	–	–	–
Outside swathing disc		–	–	–	–	–	○	–	–	–	–	○	○	○	○
Swathing belt cover		–	○	–	–	–	–	–	–	–	–	–	–	–	–
Slope control		–	●	○	○	–	–	–	–	–	–	–	–	–	–
Wear skids		○	○	○	○	○	○	○	○	○	○	○	○	○	○
Wear skids (+ 15 mm)		○	○	○	○	○	○	○	○	○	○	○	○	○	○
High-cut skids (+ 30 mm)		○	○	○	○	○	○	○	○	○	○	○	○	○	○
Double high-cut skids (+ 60 mm)		○	○	○	○	○	○	○	○	○	○	○	○	○	○
Bed protection device (for intensive use conditions)		○	○	○	○	○	○	○	○	○	○	○	○	○	○
Illuminated warning signs		●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hydraulic transport lock		●	●	●	●	●	●	●	●	●	●	●	○	–	–
Collision protection															
Mechanical		–	–	–	–	–	–	●	●	●	●	–	–	●	●
Hydraulic		●	●	●	●	●	●	–	–	–	–	●	●	–	–

¹ C = tine conditioner, RC = roller conditioner, no suffix = without conditioner

² Working width including front mower

³ Depending on front mower used, infinitely variable adjustment

⁴ Central lubrication

⁵ Standard mowing height 40 mm (continuously adjustable, 30–70 mm)

⁶ For direct individual lift option

CLAAS continually develops its products to meet customer requirements. This means that all products are subject to change without notice. All descriptions and specifications in this brochure should be considered approximate and may include optional equipment that is not part of the standard specifications. This brochure is designed for worldwide use. Please refer to your nearest CLAAS dealer and their price list for local specification details. Some protective panels may have been removed to present the function more clearly in photographs. To avoid any risks, you should never remove these protective panels yourself. In this context, please refer to the relevant instructions in the operator's manual.



CLAAS KGaA mbH
 Mühlenwinkel 1
 33428 Harrewinkel
 Deutschland
 Tel. +49 5247 12-0
claas.com