

TGS 8×8 Chassis


M Cab




ENGINEERED TO SAVE YOU MONEY ▶

SPECIFICATION DATA

М САВ



GVM 42,000kg GCM: 90,000Kg

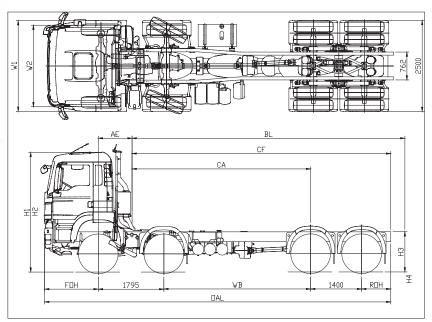

		M CAB WEIGHTS	TURNING CIRCLE			
Wheelbase	Wheelbase Front (kg)		Total (kg)	Kerb to Kerb (m)	Wall to Wall (m)	
4030mm	7765	4250	12015	25	27.4	

	LX CAB CHASSIS DIMENSIONS (MM)						EMPTY	LOADED	EMPTY	LOADED			
Wheelbase	FOH	ROH	OAL	СА	CF	AE	BL	H1	H2	Н3	H4	W1	W2
4030mm	1492	800	9517	4850	7050	975	9250	3370	3294	1180	1100	2490	2240

		ENGINE SPECIFICA	ATIONS	TRANSMISSION SPECIFICATIONS			
Engine HP	Model Power Rating		Torque	Model	Transmission Ratios	Standard Differential Ratio	
480HP	MAN D26 12.5 Ltrs	353kW @ 1900rpm	2300Nm @ 1050 – 1400 rpm	ZF 12 AS 2330 OD	12.33 – 0.78	4.00	

- All above weights and dimensions are subject to confirmation and may vary depending on final specification.
 Manufacturing weight tolerance +/- 3%.
- State and Federal regulations over ride information supplied on this brochure
- 3. Vehicle images in this specification sheet are for illustration purposes only.
- $4. \ \ Maximum \ body \ length \ is \ calculated \ using \ a \ rear \ overhang \ of \ 60\% \ of \ the \ wheelbase \ to \ a \ maximum \ of \ 3.7m.$
- 5. Tare weight includes 100 litres of fuel, spare wheel and steel wheels.
- 6. Specifications are subject to change without notice. Copyright @ 2014, MAN Automotive Imports Pty Ltd.

MAN Automotive Imports Pty Ltd

72 Formation Street, Wacol, QLD 4076 • PO Box 301, Goodna QLD 4300 T: (07) 3271 7777 • www.man.com.au

