



TGM

23.290

6x2


▶ C & L Cab

ENGINEERED TO SAVE YOU MONEY ▶




SPECIFICATION DATA



C CAB



GVM 23,000kg GCM: Available on application

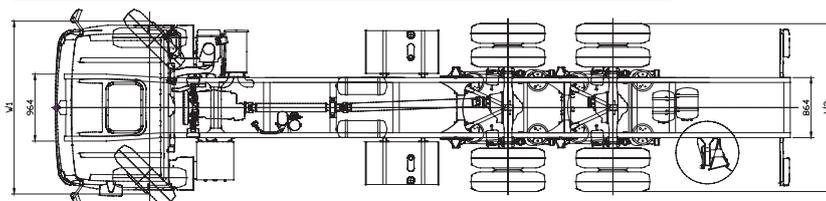

L CAB

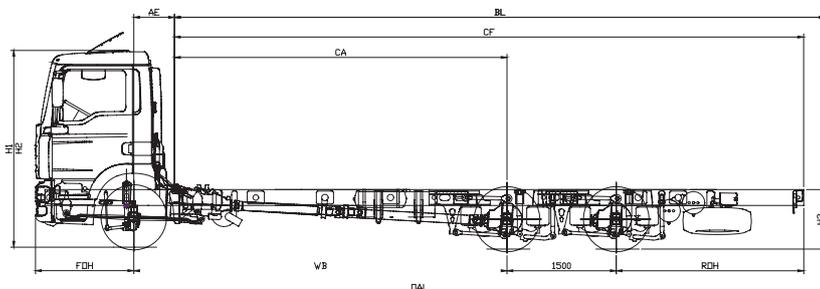

DAY CAB WEIGHTS (C CAB)

SLEEPER CAB WEIGHTS (L CAB)

TURNING CIRCLE

Wheelbase	Front (kg)	Rear (kg)	Total (kg)	Front (kg)	Rear (kg)	Total (kg)	Kerb to Kerb (m)	Wall to Wall (m)
5475+1500mm	3175	2969	6144	3345	2969	6314	23.1	24.6

Wheelbase	DIMENSIONS						MAX	EMPTY	LOADED	EMPTY	LOADED		
	FOH	ROH	OAL	CA	CF	AE	BL	H1	H2	H3	H4	W1	W2
DAY CAB (C CAB)													
5475+1500mm	1350	2775	11100	4950	9225	525	9400	2814	2736	868	838	2376	2446
SLEEPER CAB (L CAB)													
5475+1500mm	1350	2775	11100	4455	8730	1020	8905	2880	2800	864	834	2376	2446

ENGINE SPECIFICATIONS

TRANSMISSION SPECIFICATIONS

Engine HP	Model	Power Rating	Torque	Model	Transmission Ratios	Standard Differential Ratio
290HP	MAN D0836 6.9Ltrs	213kW @2300rpm	1150Nm @ 1200-1750rpm	ZF 12 AS1210 OD	10.37-0.81	4.11

- All above weights and dimensions are subject to confirmation and may vary depending on final specification. Manufacturing weight tolerance +/- 3%.
- State and Federal regulations over ride information supplied on this brochure.
- Vehicle images in this specification sheet are for illustration purposes only.
- Maximum body length is calculated using a rear overhang of 60% of the wheelbase to a maximum of 3.7m.
- Tare weight includes 100 litres of fuel, spare wheel and steel wheels.
- Specifications are subject to change without notice. Copyright © 2014, MAN Automotive Imports Pty Ltd.

MAN Automotive Imports Pty Ltd
 72 Formation Street, Wacol, QLD 4076 • PO Box 301, Goodna QLD 4300
 T: (07) 3271 7777 • www.man.com.au

